


**Drawing(mm)**

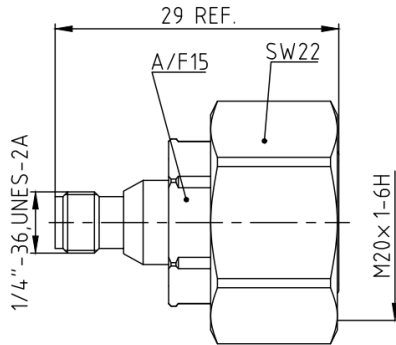

**Electrical & Environmental**

|                        |                              |
|------------------------|------------------------------|
| <b>Impedance</b>       | 50 ohm                       |
| <b>Frequency Range</b> | DC-6 GHz                     |
| <b>VSWR</b>            | 1.2 max                      |
| <b>PIM (Intermod)</b>  | -155dBc min with 2×20W tones |
| <b>Operating Temp</b>  | -40°C ~ +125°C               |
| <b>RoHS</b>            | Compliant                    |

**Material**

|                       |                                |
|-----------------------|--------------------------------|
| <b>Connector Body</b> | Ternary alloy plated brass     |
| <b>Center Contact</b> | Silver plated beryllium copper |
| <b>Insulator</b>      | PTFE                           |
| <b>Weight</b>         | 35g                            |