


Drawing(mm)

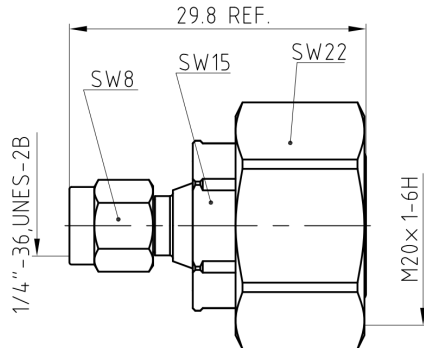

Electrical & Environmental

| | |
|------------------------|------------------------------|
| Impedance | 50 ohm |
| Frequency Range | DC-6 GHz |
| VSWR | 1.2 max |
| PIM (Intermod) | -155dBc min with 2x20W tones |
| Operating Temp | -40°C ~ +125°C |
| RoHS | Compliant |

Material

| | |
|-----------------------|----------------------------|
| Connector Body | Ternary alloy plated brass |
| Center Contact | Silver plated brass |
| Insulator | PTFE |
| Weight | 34g |