


### Drawing(mm)

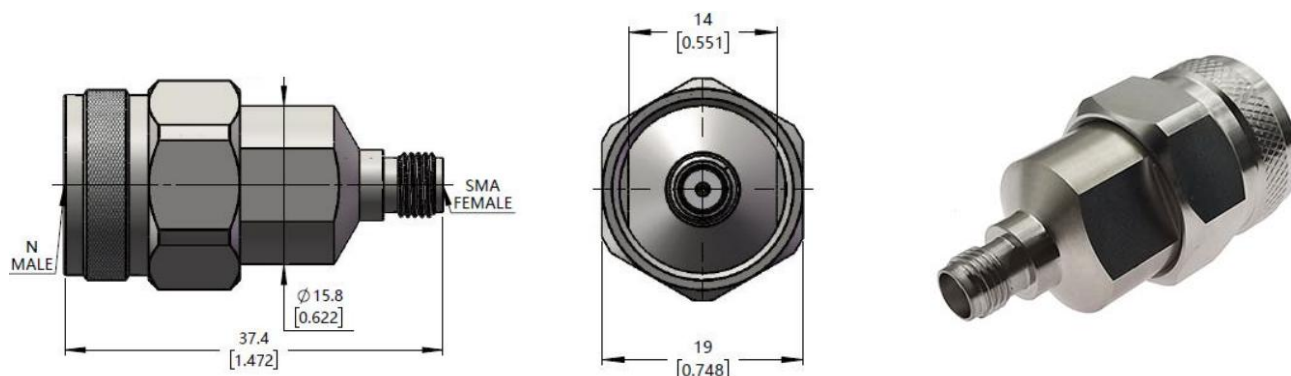

### Electrical & Environmental

Impedance	50 ohm
Frequency Range	18 GHz
VSWR	1.15 max
Operating Temp	-55℃ to +165℃
Interface	N&SMA per MIL-STD-348

### Material

Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper
Insulator	PEI&PTFE

### Typical Test Data

