

Coaxial Fixed Attenuator

RFHB06XXTC2



DC-6 GHz, 1-40 dB, 2 Watts, TNC, Bidirectional

| Rev | 5 |
|-----|---|
| Rev | 5 |


Electrical

| Impedance | 50 ohm | | | |
|-----------------|--|------|------|------|
| Frequency Range | DC-6 GHz | | | |
| VSWR | 1.2 max | | | |
| Input Avg Power | 2W@ 25 $^\circ C$ ambient, derating linearly to 0.2W at 100 $^\circ C$ | | | |
| Peak Power | 250W (5 micro-sec pulse width, 0.4% duty cycle) | | | |
| Direction | Bidirectional, TNC female to TNC male (other configurations available) | | | |
| Attenuation(dB) | 1-10 | 20 | 30 | 40 |
| Accuracy(dB) | ±0.5 | ±0.6 | ±0.8 | ±0.8 |

Mechanical

| Mechanical | | Environmental | |
|----------------|------------------------------------|-------------------------|---------------------------|
| Connector Body | Ternary alloy plated brass | Operating Temperature | -55 ℃ to 100℃ |
| Heat Sink | N/A | Storage Temperature | -55℃ to 125℃ |
| Center Contact | Gold plated beryllium copper/brass | RoHS | Compliant |
| Net Weight | About 25g | Temperature Coefficient | <0.0004 dB/dB/℃ |

Dimensions(mm)

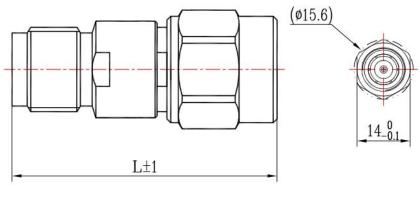

1-30dB: L=35

40dB: L=38

Notes

1.Customized dB values, outlines and optimal accuracy/VSWR available.

Model Description

RFHB06XXTC2

1.XX for dB value: 06=6dB,30=30dB 2.Code for connector configuration: A=female for two ends; B=male for two ends C=female for one end and male for the other.