

Waveguide to Coaxial Adapter AWR34292G

WR34 to 2.92mm Female, Square Grooved Flange, Right Angle



Rev 3

Electrical

Frequency Range	21.7-33 GHz
VSWR	1.2 max

Configuration

Waveguide Size	IEC	260
	EIA	WR34
Flange Type	IEC	PBR260
Coax Connector	2.92mm Female	
Body Geometry	Right Angle	


Materials

Waveguide Body	Copper, black or grey painted
Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper

Mechanical & Environmental

Operating Temp	-40°C to 70°C
Connector Interface	MIL-STD-348
RoHS	Compliant

Typical Test Data

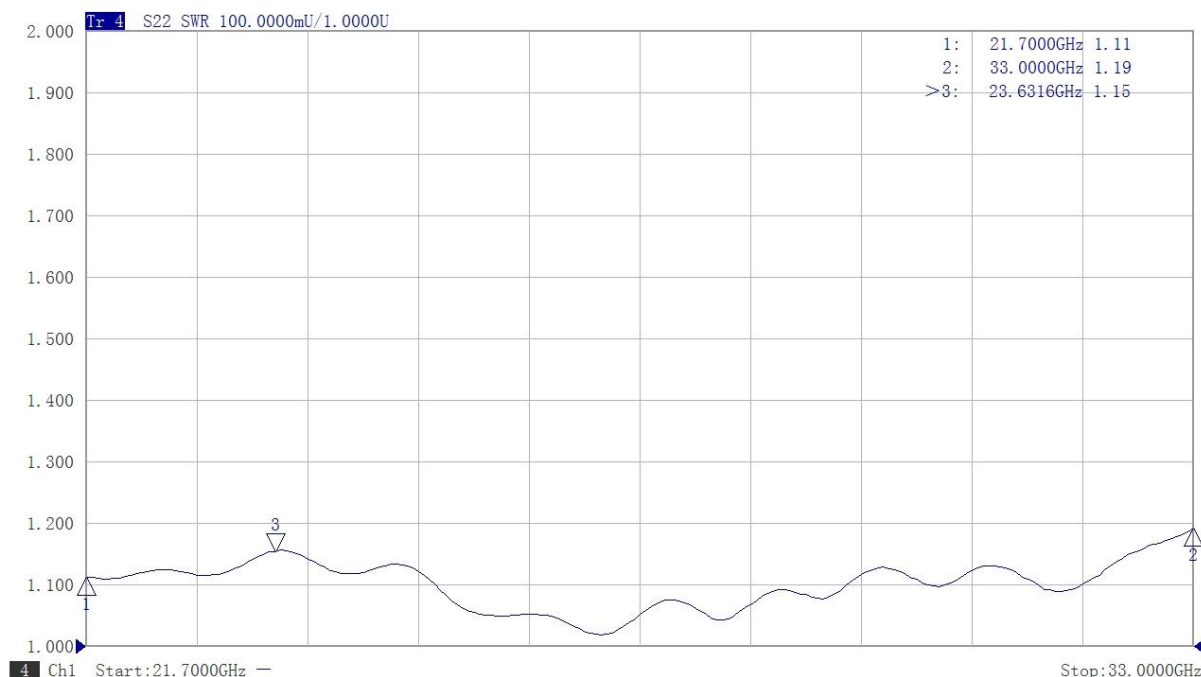

Waveguide to Coaxial Adapter **AWR34292G**

WR34 to 2.92mm Female, Square Grooved Flange, Right Angle



Rev 3

Dimensions(mm)

