


TNCA Female to TNCA Male Right Angle Adapter, TVAC Compatible

Drawing (mm)

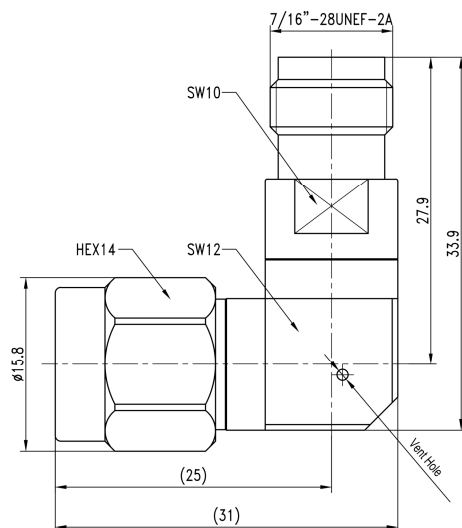

Electrical

Impedance	50 ohm
Frequency Range	DC-18 GHz
VSWR	1.25 max

Mechanical

Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper / Gold plated brass
Insulator	PEI & PTFE

Environmental

Operating Temperature	-55°C to +125°C
Operating Vacuum	$\leq 5 \times 10^{-6}$ mbar
Low Outgassing	Materials selected per ASTM E595 criteria (TML < 1%, CVCM < 0.1%)
Venting	Vent hole provided for rapid pressure equalization
Mechanical Shock	MIL-STD-202, Method 213, Cond. B
Random Vibration	MIL-STD-202, Method 214, Cond. A
Thermal Shock	MIL-STD-202, Method 107, Cond. B

TNCA Female to TNCA Male Right Angle Adapter, TVAC Compatible

Typical Test Data at 25°C ambient

