

WR90 to SMA Female Waveguide to Coaxial Adapter
UBR100 Flange, Right Angle, TVAC Compatible

Rev 1

Electrical

Frequency Range	8.2-12.5 GHz
VSWR	1.2 max


Mechanical

Waveguide Size	WR90
Flange	UBR100
Coax Connector	SMA Female
Body Geometry	Right Angle
Waveguide Body	Aluminum, conductive oxidation finish, without painting
Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper
Net Weight	Approx 60g

Environmental




Operating Temperature	-55°C to +85°C
Operating Vacuum	$\leq 5 \times 10^{-6}$ mbar
Low Outgassing	Materials selected per ASTM E595 criteria (TML < 1%, CVCM < 0.1%)
Venting	Vent hole provided for rapid pressure equalization
Mechanical Shock	MIL-STD-202, Method 213, Cond. B
Random Vibration	MIL-STD-202, Method 214, Cond. A
Thermal Shock	MIL-STD-202, Method 107, Cond. B

WR90 to SMA Female Waveguide to Coaxial Adapter
UBR100 Flange, Right Angle, TVAC Compatible




Rev 1

Dimensions (mm)

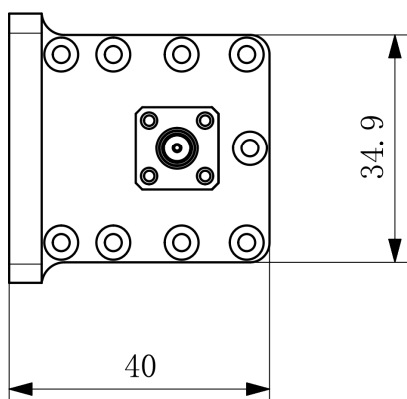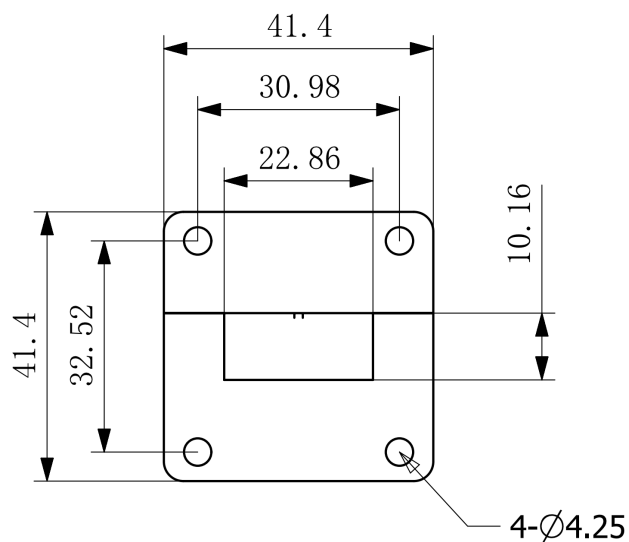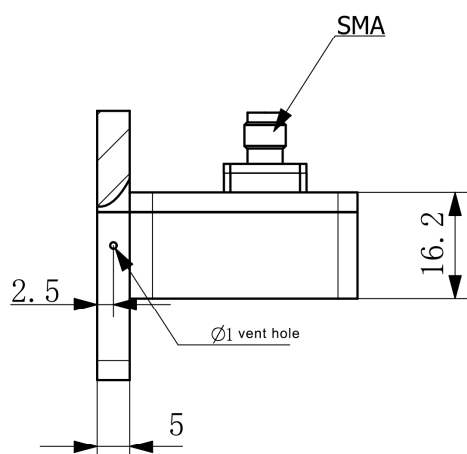


WR90 to SMA Female Waveguide to Coaxial Adapter UBR100 Flange, Right Angle, TVAC Compatible




Rev 1

Typical Test Data at 25°C ambient

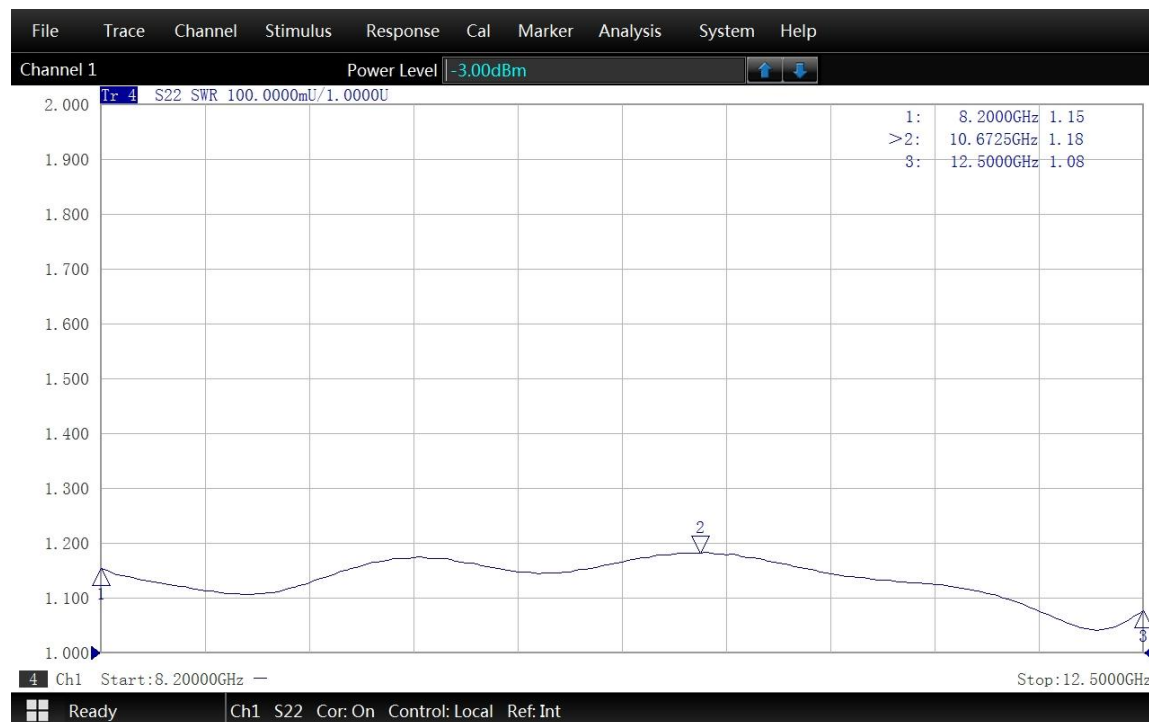

VSWR

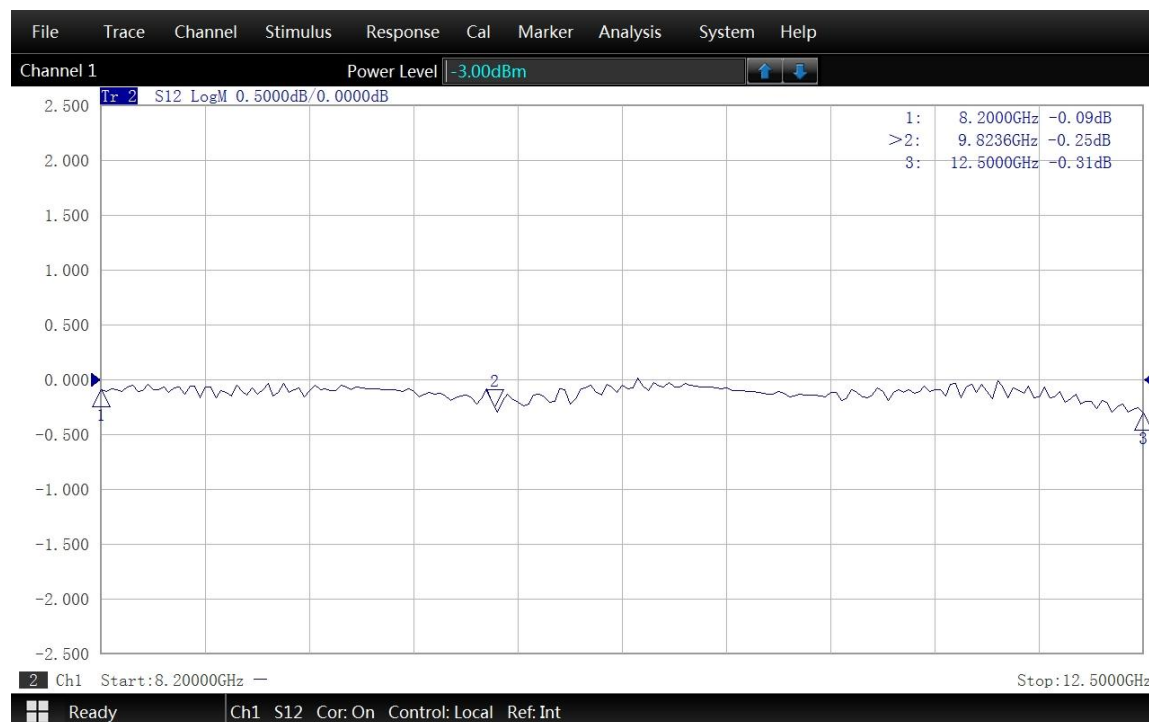

Insertion Loss*

* In Insertion Loss (IL) testing, adapters are measured back-to-back. To obtain the loss of a single adapter, divide the measured value by two.