

## **Double Ridge Waveguide to Coax Adapter**

## **AWRD500N**

# WRD500 to N Female, Cover Flange, Right Angle



Rev 3

#### **Electrical**

Frequency Range	5-18 GHz
VSWR	1.3 max
Average Power	150 Watts

## Configuration

Waveguide Size	WRD500
Flange Type	Cover, FPWRD500
Coax Connector	N Female
Body Geometry	Right Angle


#### **Materials**

Waveguide Body	Aluminum, grey or black painted
Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper

#### **Mechanical & Environmental**

Operating Temp	-40℃ to 70℃
Connector Interface	MIL-STD-348
RoHS	Compliant

## **Typical Test Data**

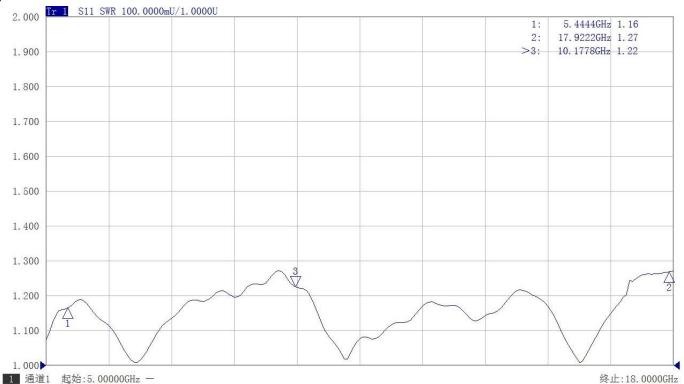



## **Double Ridge Waveguide to Coax Adapter**

## **AWRD500N**

# WRD500 to N Female, Cover Flange, Right Angle



Rev 3

## Dimensions(mm)

