




17100-21400 MHz Band Pass Filter **BPF-19250MK1**

RVA 1

Specifications

| | | | |
|----|--------------------------|---|--|
| 1 | Center Frequency(F0) | 19250MHz | |
| 2 | Pass Band Frequency | 17100 ~ 21400 MHz | |
| 3 | Pass Band Insertion Loss | ≤0.8dB | |
| 4 | Pass Band Ripple | ≤0.45dB | |
| 5 | Pass Band Return Loss | ≥18dB | |
| 6 | Stop Band Rejection | ≥80dB @ DC ~ 14850MHz ≥30dB @ 14850 ~ 16100MHz | ≥30dB @ 22400 ~ 23300MHz ≥80dB @ 23300 ~ 34000MHz |
| 7 | Impedance | 50 Ohms | |
| 8 | Power Handling | 5W max | |
| 9 | Connectors | 2.92mm Female | |
| 10 | Surface Finish | Black Painted | |
| 11 | Temperature Range | -30℃ ~ +70℃ | |
| 12 | Weight | 65g | |

Dimensions(mm)

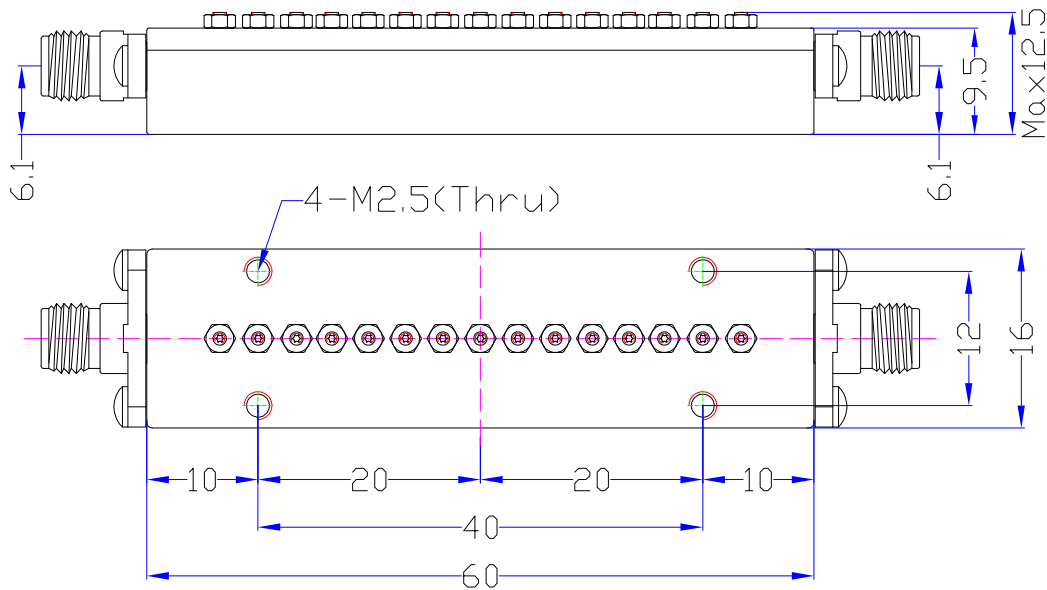



17100-21400 MHz Band Pass Filter BPF-19250MK1

RVA 1

Typical Test Data

