


Drawing(mm)

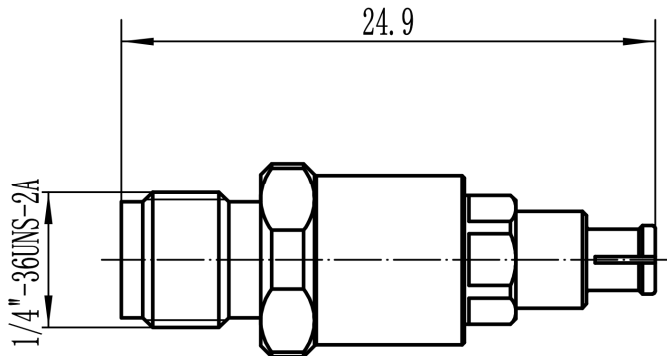

Electrical & Environmental

Impedance	50 ohm
Frequency Range	34 GHz
VSWR	1.25(DC-27GHz), 1.3(DC-34GHz)
Operating Temp	-55°C to +165°C
Interface	3.5mm per IEC 60169, SMP per MIL-STD-348

Material

Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper
Insulator	PEI&PTFE

Typical Test Data

