21-31 GHz Band Pass Filter BPF-26000MK1

RVA 1

Specifications

1	Center Frequency(F0)	26000MHz	
2	Pass Band Frequency	21000 ~ 31000 MHz	
3	Pass Band Insertion Loss	≤1.15dB	
4	Pass Band Ripple	≤0.55dB	
5	Pass Band Return Loss	≥17dB	
6	Stop Band Rejection	≥80dB @ DC ~ 19.05GHz ≥40dB @ 19.05 ~ 20GHz	≥41dB @ 32 ~ 32.62GHz ≥80dB @ 32.62 ~ 53GHz
7	Impedance	50 Ohms	
8	Power Handling	5W max	
9	Connectors	2.92mm Female	
10	Surface Finish	Black Painted	
11	Temperature Range	-30℃ ~ +70℃	
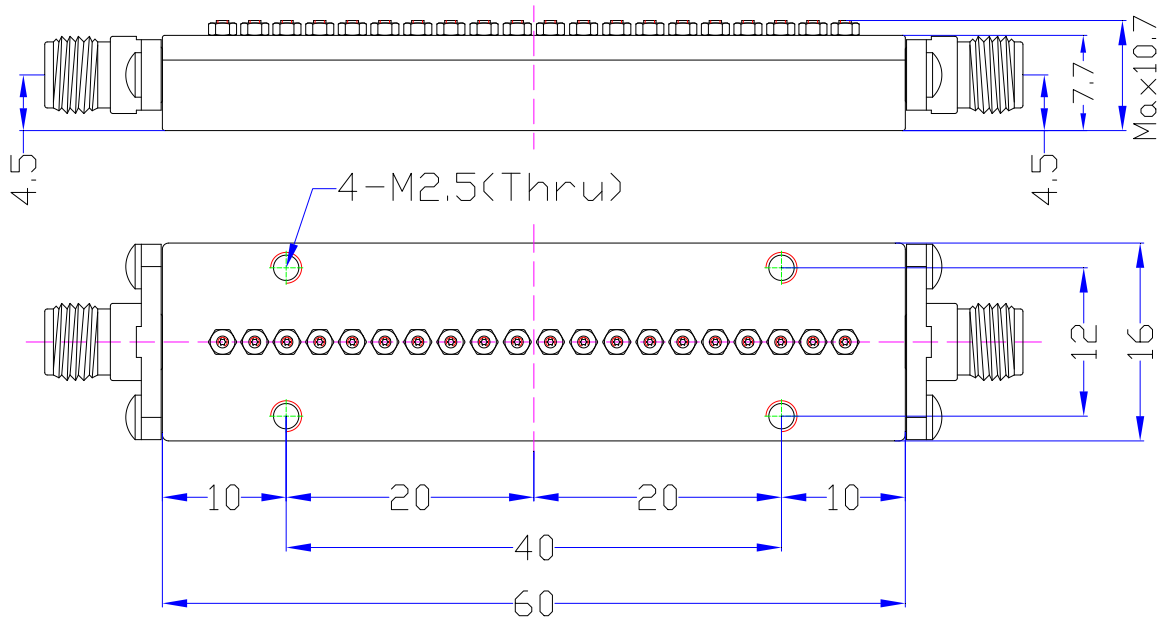
Dimensions(mm)