30000-35000 MHz Band Pass Filter BPF-32500MK1

RVA 1

Specifications

1	Center Frequency(F0)	32500MHz	
2	Pass Band Frequency	30000 ~ 35000 MHz	
3	Pass Band Insertion Loss	≤1.3dB	
4	Pass Band Ripple	≤0.5dB	
5	Pass Band Return Loss	≥20dB	
6	Stop Band Rejection	≥80dB @ DC ~ 28350MHz ≥55dB @ 28350 ~ 29000MHz	≥50dB @ 36000 ~ 36650MHz ≥80dB @ 36650 ~ 70000MHz
7	Impedance	50 Ohms	
8	Power Handling	5W max	
9	Connectors	2.92mm Female	
10	Surface Finish	Black Painted	
11	Temperature Range	-30℃ ~ +70℃	
12	Weight	46g	
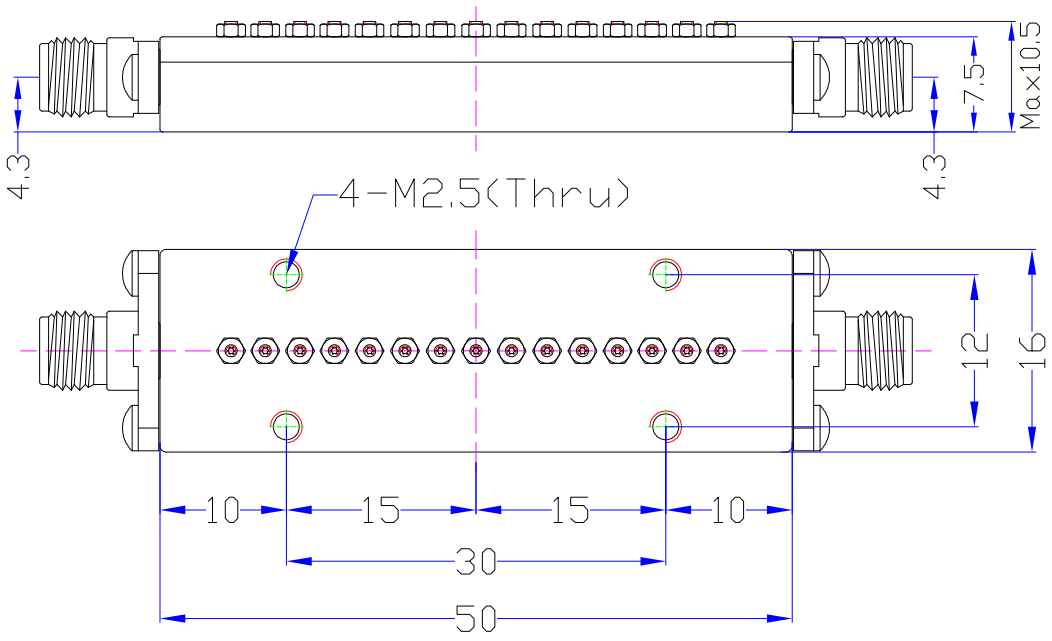
Dimensions(mm)