28-42 GHz Band Pass Filter BPF-35000MQ1

RVA 1

Specifications

1	Center Frequency(F0)	35000MHz	
2	Pass Band Frequency	28000 ~ 42000 MHz	
3	Pass Band Insertion Loss	≤1.15dB	
4	Pass Band Ripple	≤0.48dB	
5	Pass Band Return Loss	≥16dB	
6	Stop Band Rejection	≥80dB @ DC ~ 25.8GHz ≥31dB @ 25.8 ~ 27GHz	≥30dB @ 43 ~ 44.46GHz ≥80dB @ 44.46 ~ 58GHz
7	Impedance	50 Ohms	
8	Power Handling	5W max	
9	Connectors	2.4mm Female	
10	Surface Finish	Black Painted	
11	Temperature Range	-30℃ ~ +70℃	
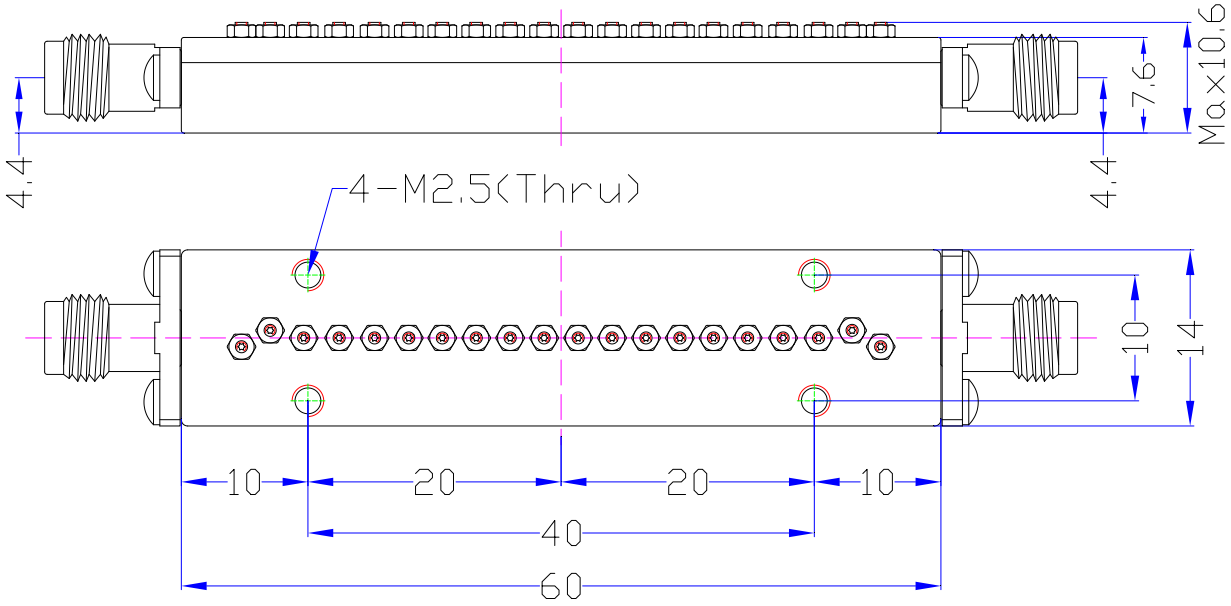
Dimensions(mm)