



## 400 -470 MHz Band Stop Filter


## BSF-435MS1

RVA 1

### Specifications

|    |                          |                    |
|----|--------------------------|--------------------|
| 1  | Pass Band Frequency      | DC-350&520-2500MHz |
| 2  | Stop Band Frequency      | 400-470MHz         |
| 3  | Pass Band Insertion Loss | ≤3.0dB             |
| 4  | Return Loss              | ≥8 dB              |
| 5  | Stop Band Attenuation    | ≥40dB @ 400-470MHz |
| 6  | Impedance                | 50 ohms            |
| 7  | Power                    | ≤50W               |
| 8  | Connectors               | SMA-Female         |
| 9  | Surface Finish           | Black Paint        |
| 10 | Temperature Range        | 0°C ~ +55°C        |

### Dimensions (Unit: mm)

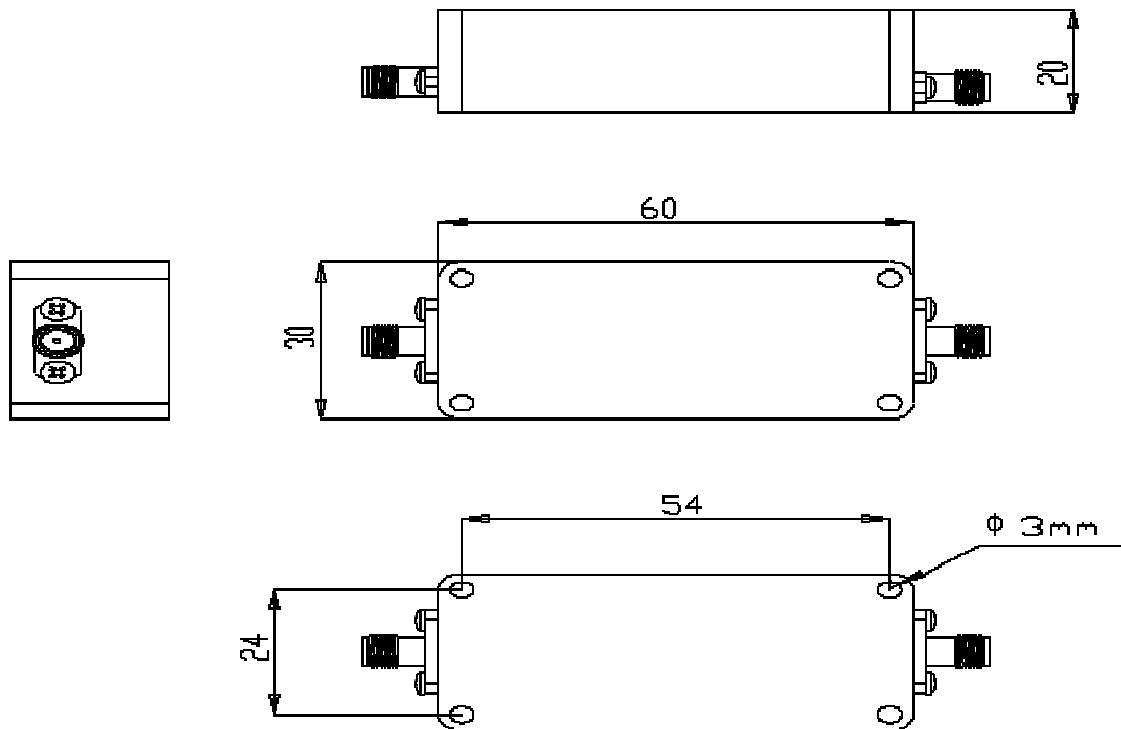



# 400 -470 MHz Band Stop Filter

# BSF-435MS1

RVA 1

## Typical Test Data

