

Low PIM Attenuator

RALXX100FA-A

555-6000MHz, 100 Watts, 160dBC, 4.3-10 Connector



Rev 3

Electrical

Impedance	50 ohm				
Frequency Range	555-6000 MHz				
Return Loss	≥18dB(Input Port)				
Input Avg Power	100W				
PIM (Intermod)	-160dBc min (with 2×20W tones at 850&2600MHz@25℃)				
Direction	Unidirectional, 4.3-10 female input, 4.3-10 female output (other configurations available)				

Attenuation(dB)	6	10	15	20	30
Accuracy(dB)	±2	±2	±2	±2	±2


Mechanical

Connector Body	Ternary alloy plated brass
Heat Sink	Black anodized aluminum
Center Contact	Silver plated beryllium copper
Weight	About 1500g

Environmental

Operating Temp	-40℃ to 75℃
RoHS	Compliant
Ingress Protection	IP40 (IP65 available upon request)

Dimensions(mm)

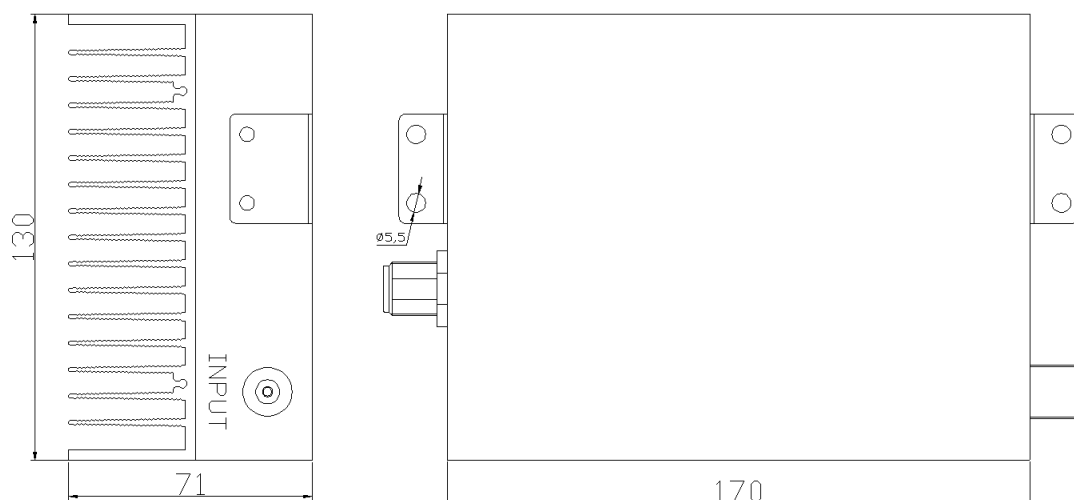

Notes

- 1.Always pay attention to the direction of attenuators.
- 2.To maintain best performance, recommended to use fan to keep the case temperature under 85℃.
- 3.Customized dB values, outlines and optimal accuracy/VSWR available.

Model Description

RALXX100FA-A

- 1.XX for dB value: 06=6dB,30=30dB
- 2.Code for connector configuration:
A=female for two ends; B=male for two ends
C=female for input and male for output;
D=male for input and female for output.