

Coaxial Fixed Attenuator

RFH12XXND100



DC-12.4 GHz, 6-60 dB, 100 Watts, N, Unidirectional

Rev 3


Electrical

| Impedance | 50 ohm | | | | |
|-----------------|--|------|------|------|-------|
| Frequency Range | DC-12.4 GHz | | | | |
| VSWR | 1.35 max | | | | |
| Input Avg Power | 100W@ 25 $^\circ C$ ambient, derating linearly to 10W at 100 $^\circ C$ | | | | |
| Peak Power | 5kW (5 micro-sec pulse width, 0.5% duty cycle) | | | | |
| Direction | Unidirectional, N male input, N female output (other configurations available) | | | | |
| Attenuation(dB) | 6-10 | 20 | 30 | 40 | 50,60 |
| Accuracy(dB) | ±0.9 | ±0.9 | ±1.0 | ±1.0 | ±1.1 |

Mochanical

| Mechanical | | Environmental | | |
|----------------|---|-------------------------|---------------------------|--|
| Connector Body | Ternary alloy plated brass | Operating Temperature | -55℃ to 100℃ | |
| Heat Sink | Black anodized aluminum Storage Temperature | | -55℃ to 125℃ | |
| Center Contact | Gold plated beryllium copper/brass | RoHS | Compliant | |
| Net Weight | About 600 g | Temperature Coefficient | <0.0004 dB/dB/℃ | |

Dimensions(mm)

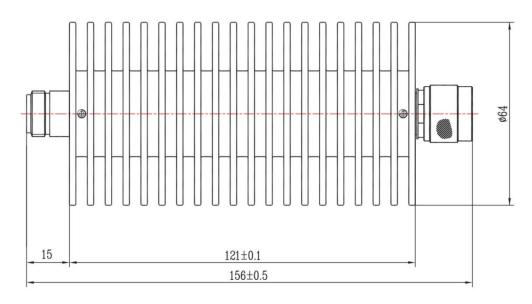

Notes

1. Always pay attention to the direction of attenuators. 2.To maintain best performance, recommended to use fan to keep the case temperature under 85°C. 3.Customized dB values, outlines and optimal accuracy/VSWR available.

Model Description RFH12XXND100

1.XX for dB value: 06=6dB,30=30dB 2.Code for connector configuration: A=female for two ends; B=male for two ends C=female for input and male for output; D=male for input and female for output.