

Coaxial Fixed Attenuator

RFH18XXND150-D



DC-18 GHz, 6-60 dB, 150 Watts, N, Unidirectional

Rev	3


Impedance	50 ohm				
Frequency Range	DC-18 GHz				
VSWR	1.45 max				
Input Avg Power	150W@ 25 $^\circ C$ ambient, derating linearly to 15W at 100 $^\circ C$				
Peak Power	5kW (5 micro-sec pulse width, 1% duty cycle)				
Direction	Unidirectional, N male input, N female output (other configurations available)				
Attenuation(dB)	6-10	20	30	40	50,60
Accuracy(dB)	±1.5	±1.5	±1.3	±1.3	±1.4

Mechanical

Electrical

Mechanical		Environmental		
Connector Body	Passivated stainless steel	Operating Temperature	-55 ℃ to 100℃	
Heat Sink	Black anodized aluminum	Storage Temperature	-55 ℃ to 125℃	
Center Contact	Gold plated beryllium copper/brass	RoHS	Compliant	
Net Weight	About 2200 g	Temperature Coefficient	<0.0004 dB/dB/ ℃	

Dimensions(mm)

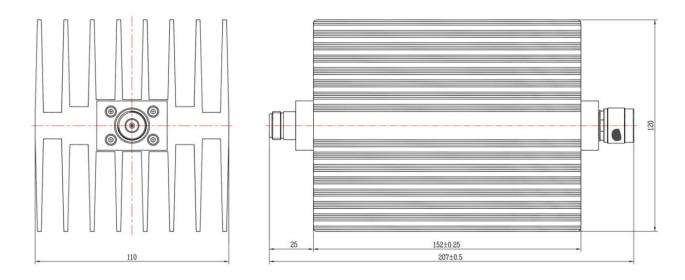

Notes

1. Always pay attention to the direction of attenuators. 2.To maintain best performance, recommended to use fan to keep the case temperature under 85°C. 3.Customized dB values, outlines and optimal accuracy/VSWR available.

Model Description

RFH18XXND150-D

1.XX for dB value: 06=6dB,30=30dB 2.Code for connector configuration: A=female for two ends; B=male for two ends C=female for input and male for output;

D=male for input and female for output.