

Coaxial Fixed Attenuator

RFH18XXND250-DC



DC-18 GHz, 10-60 dB, 250 Watts, N, Unidirectional, Conduction Cooled

Rev 3

Electrical

| Impedance | 50 ohm | | | | |
|-----------------|---|------|------|------|-------|
| Frequency Range | DC-18 GHz | | | | |
| VSWR | 1.45 max | | | | |
| Input Avg Power | 250W@ 25 $^\circ\mathbb{C}$ ambient, derating linearly to 25W at 100 $^\circ\mathbb{C}$ | | | | |
| Peak Power | 5kW (5 micro-sec pulse width, 2% duty cycle) | | | | |
| Direction | Unidirectional, N male input, N female output (other configurations available) | | | | |
| Attenuation(dB) | 10 | 20 | 30 | 40 | 50,60 |
| Accuracy(dB) | ±3.0 | ±3.0 | ±1.5 | ±1.3 | ±1.4 |


Mechanical


| Connector Body | Passivated stainless steel | |
|----------------|------------------------------------|--|
| Heat Sink | Black anodized aluminum | |
| Center Contact | Gold plated beryllium copper/brass | |
| Net Weight | About 1100 g | |

Environmental

| Operating Temperature | -55°C to 100°C | |
|-------------------------|-----------------|--|
| Storage Temperature | -55℃ to 125℃ | |
| RoHS | Compliant | |
| Temperature Coefficient | <0.0004 dB/dB/℃ | |

Dimensions(mm)



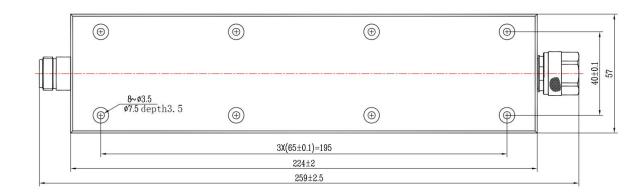

Notes

- 1. Always pay attention to the direction of attenuators.
- 2.To maintain best performance, recommended to use fan to keep the case temperature under 85° C.
- 3.Customized dB values, outlines and optimal accuracy/VSWR available.

Model Description

RFH18XXND250-DC

- 1.XX for dB value: 06=6dB,30=30dB
- 2.Code for connector configuration:
- A=female for two ends; B=male for two ends
- C=female for input and male for output;
- D=male for input and female for output.