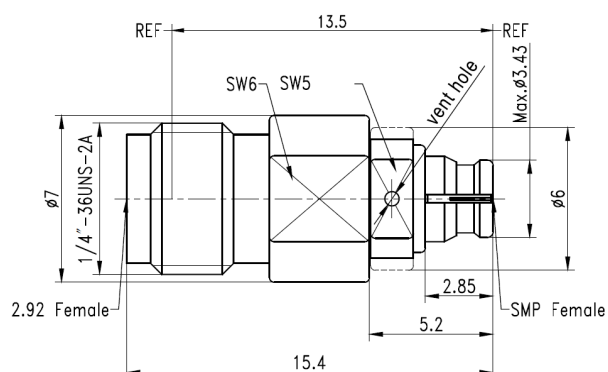


Drawing(mm)

Electrical & Environmental

Impedance	50 ohm
Frequency Range	DC-40 GHz
VSWR	1.3 max
Operating Temp	-55℃ to +165℃
Interface	2.92mm&SMP per MIL-STD-348

Material

Connector Body	Passivated stainless steel & Gold plated beryllium copper
Center Contact	Gold plated beryllium copper
Insulator	PEI