

# **Coaxial Fixed Attenuator**

### RFHB06XXNA25-A



# DC-6 GHz, 1-50 dB, 25 Watts, N, Bidirectional

Rev 3

### **Electrical**

| Impedance       | 50 ohm                                                               |       |       |       |
|-----------------|----------------------------------------------------------------------|-------|-------|-------|
| Frequency Range | DC-6 GHz                                                             |       |       |       |
| VSWR            | 1.25 max                                                             |       |       |       |
| Input Avg Power | 25W@ 25℃ ambient, derating linearly to 2.5W at 100℃                  |       |       |       |
| Peak Power      | 1kW (5 micro-sec pulse width, 1% duty cycle)                         |       |       |       |
| Direction       | Bidirectional, N female to N female (other configurations available) |       |       |       |
| Attenuation(dB) | 1-10                                                                 | 11-20 | 21-30 | 31-40 |
| Accuracy(dB)    | ±0.5                                                                 | ±0.6  | ±0.8  | ±0.8  |


#### Mechanical

| Connector Body | Ternary alloy plated brass         |  |
|----------------|------------------------------------|--|
| Heat Sink      | Black anodized aluminum            |  |
| Center Contact | Gold plated beryllium copper/brass |  |
| Net Weight     | About 195 g                        |  |

### **Environmental**

| Operating Temperature   | -55℃ to 100℃    |
|-------------------------|-----------------|
| Storage Temperature     | -55℃ to 125℃    |
| RoHS                    | Compliant       |
| Temperature Coefficient | <0.0004 dB/dB/℃ |

### Dimensions(mm)

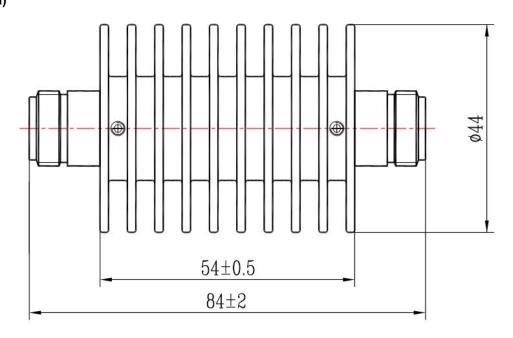

### **Notes**

- 1.To maintain best performance, recommended to use fan to keep the case temperature under  $85\,^\circ\!\mathrm{C}\,.$
- 2.Customized dB values, outlines and optimal accuracy/VSWR available.

### **Model Description**

## RFHB06XXNA25-A

- 1.XX for dB value: 06=6dB,30=30dB
- 2.Code for connector configuration:

A=female for two ends; B=male for two ends C=female for one end and male for the other.