

## **Coaxial Fixed Attenuator**

# RFHB12XXNC15



### DC-12.4 GHz, 1-40 dB, 15 Watts, N, Bidirectional


Rev 3

| Electrical      |   |       |       |       |  |
|-----------------|---|-------|-------|-------|--|
| Impedance       | 50 ohm  |       |       |       |  |
| Frequency Range | DC-12.4 GHz   |       |       |       |  |
| VSWR            | 1.35 max  |       |       |       |  |
| Input Avg Power | 15W@ 25 $^\circ\!\!{ m C}$ ambient, derating linearly to 1.5W at 100 $^\circ\!\!{ m C}$ |       |       |       |  |
| Peak Power      | 500W (5 micro-sec pulse width, 1% duty cycle)   |       |       |       |  |
| Direction       | Bidirectional, N female to N male (other configurations available)                      |       |       |       |  |
| Attenuation(dB) | 1-10  | 11-20 | 21-30 | 31-40 |  |
| Accuracy(dB)    | ±0.6  | ±0.7  | ±0.8  | ±0.9  |  |

#### Mechanical

| Mechanical     |  | Environmental                               |                           |  |
|----------------|--|---|---------------------------|--|
| Connector Body | Ternary alloy plated brass Operating Temperatu |   | <b>-55</b> ℃ to 100℃      |  |
| Heat Sink      | Black anodized aluminum                        | Black anodized aluminum Storage Temperature |                           |  |
| Center Contact | Gold plated beryllium copper/brass             | RoHS  | Compliant                 |  |
| Net Weight     | About 115 g                                    | Temperature Coefficient                     | <b>&lt;0.0004 dB/dB/℃</b> |  |

#### Dimensions(mm)

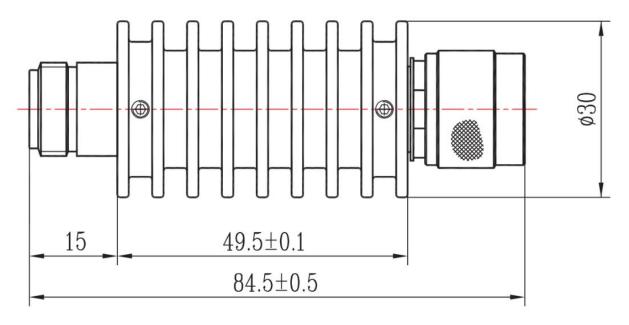

#### Notes

1.To maintain best performance, recommended to use fan to keep the case temperature under 85°C. 2.Customized dB values, outlines and optimal

accuracy/VSWR available.

### **Model Description**

#### RFHB12XXNC15

1.XX for dB value: 06=6dB,30=30dB 2.Code for connector configuration:

A=female for two ends; B=male for two ends

C=female for one end and male for the other.