

25 dBi Gain, 39.2-59.6 GHz, WR19 Standard Gain Horn with 1.85mm Female Port

Rev 1


Electrical

Frequency Range	39.2-59.6 GHz
Norminal Gain	25 dBi
Polarization	Linear
VSWR	1.3 max
3dB Beamwidth	E-Plane: 7.7~10.3 deg, H-Plane: 7.4~10.6 deg
Operating Temperature	-40°C~+70°C


Mechanical

Waveguide Size	WR19
Flange Type	UG383/U-Mod Round Cover Flange
Body Material and Finish	Copper, painting over gold plating
RF Connector	1.85mm Female

Dimensions(mm)

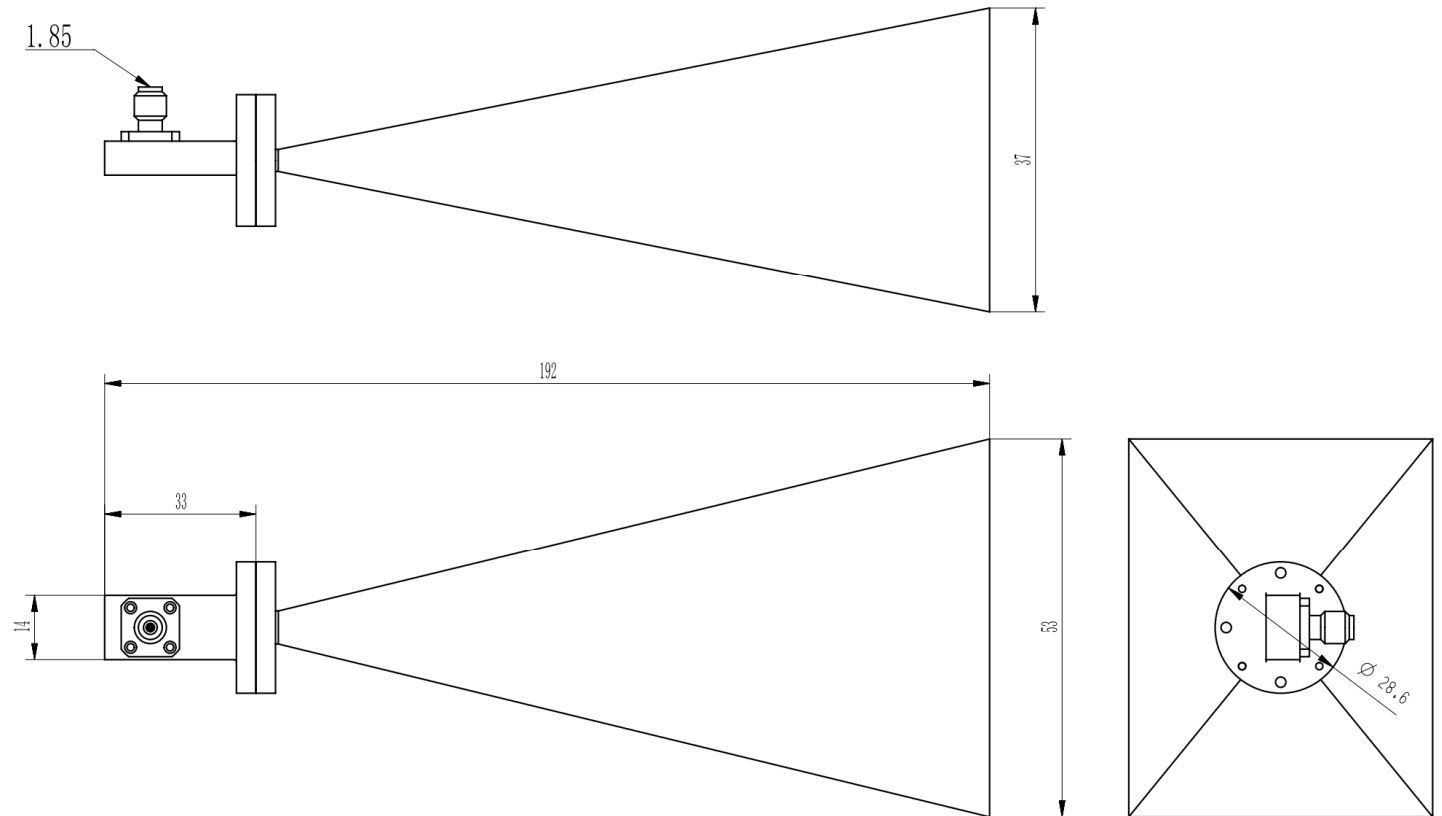


Simulated Antenna Patterns

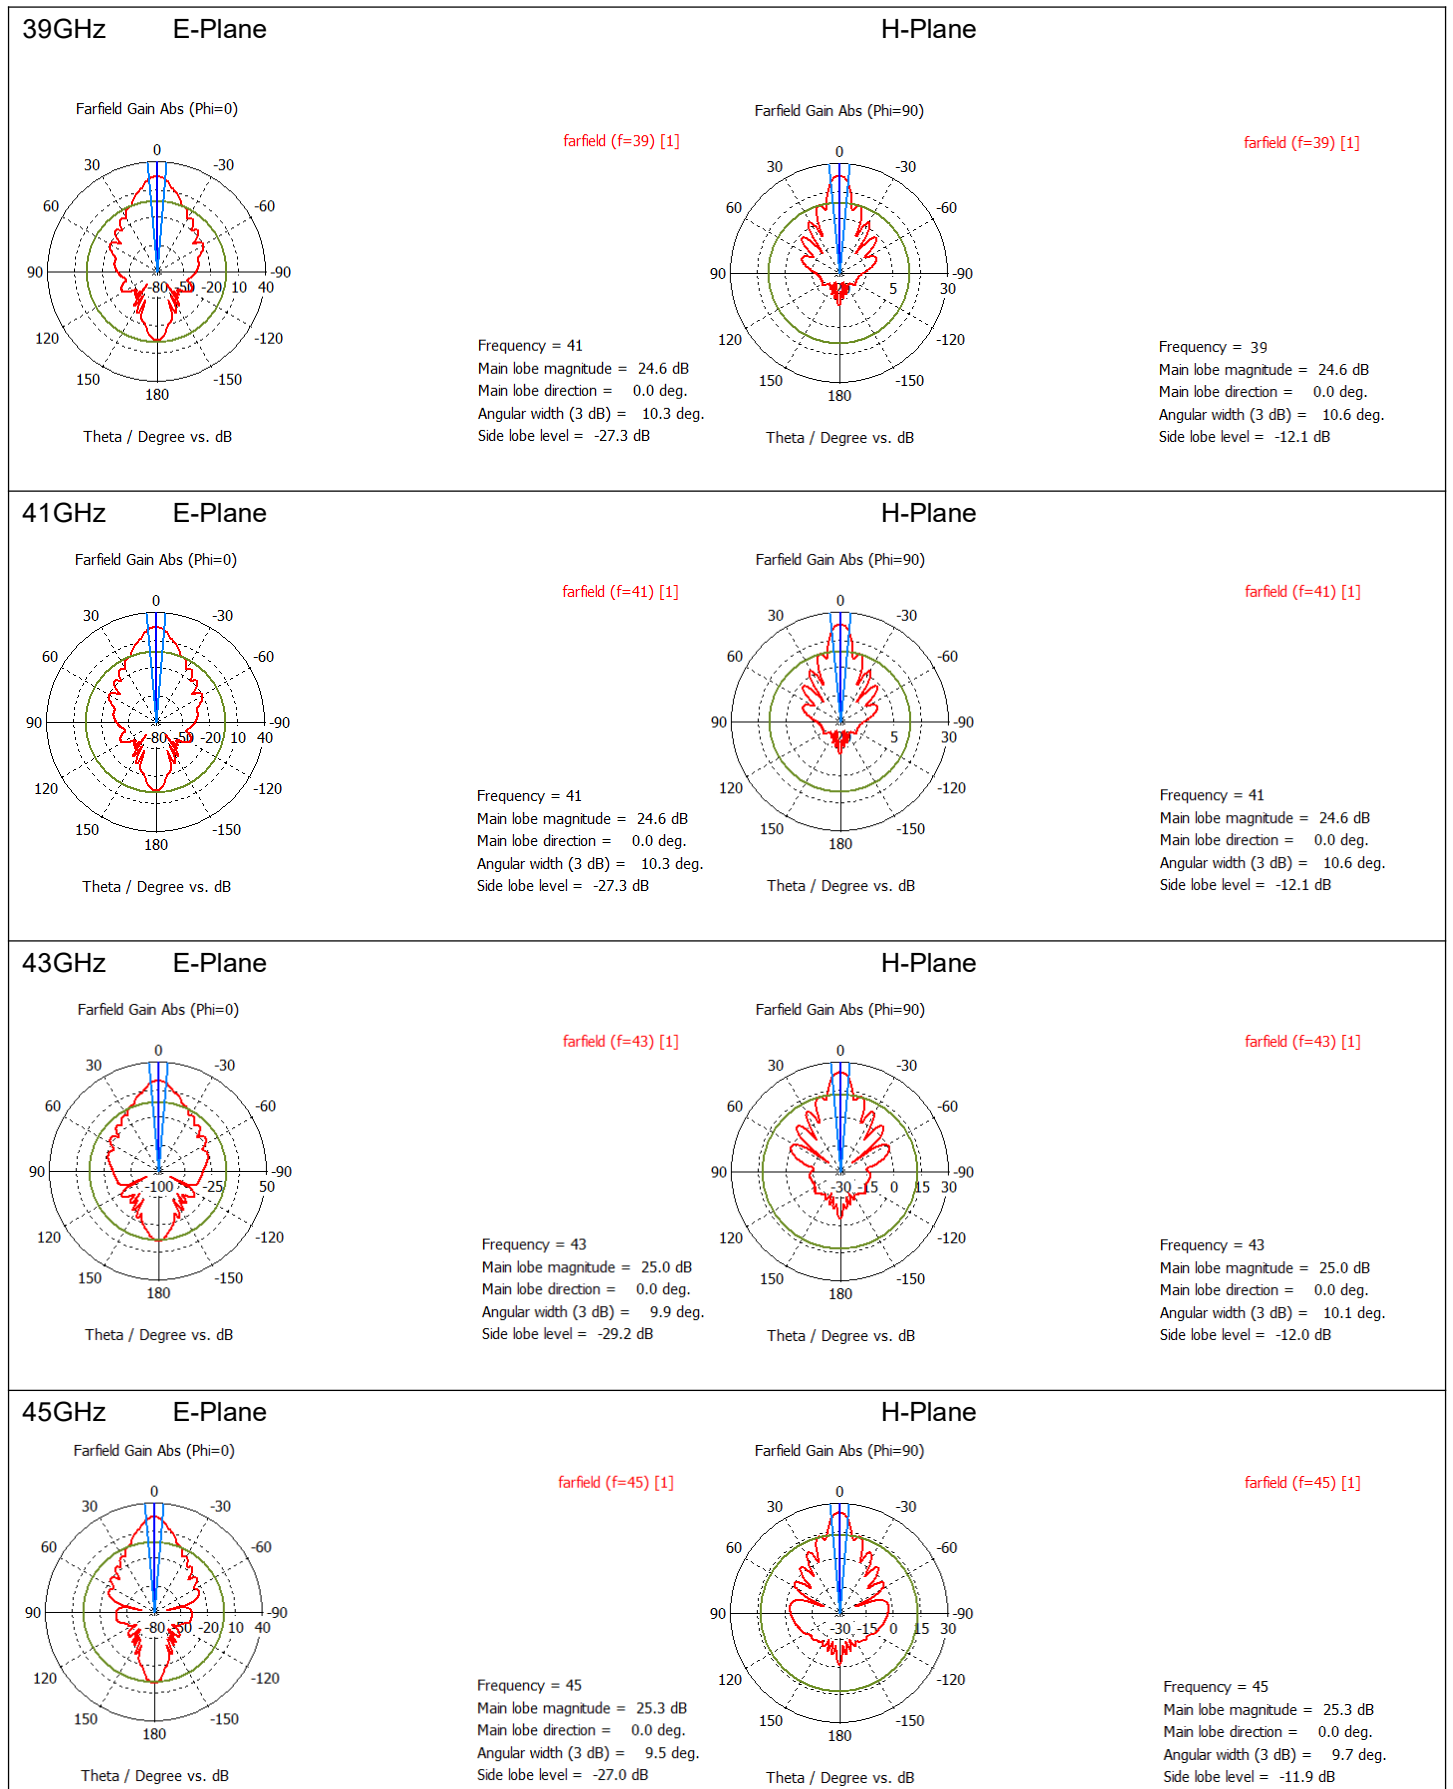

47GHz E-Plane

Farfield Gain Abs (Phi=0)

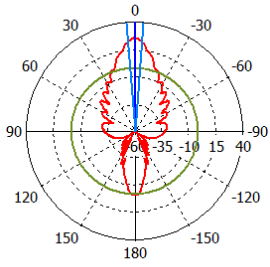


Theta / Degree vs. dB

farfield (f=47) [1]

Frequency = 47
Main lobe magnitude = 25.6 dB
Main lobe direction = 0.0 deg.
Angular width (3 dB) = 9.2 deg.
Side lobe level = -26.8 dB

H-Plane

Farfield Gain Abs (Phi=90)

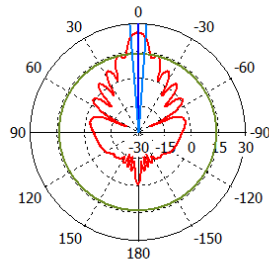


Theta / Degree vs. dB

farfield (f=47) [1]

Frequency = 47
Main lobe magnitude = 25.6 dB
Main lobe direction = 0.0 deg.
Angular width (3 dB) = 9.3 deg.
Side lobe level = -11.7 dB

49GHz E-Plane

Farfield Gain Abs (Phi=0)

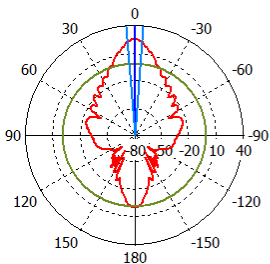


Theta / Degree vs. dB

farfield (f=49) [1]

Frequency = 49
Main lobe magnitude = 25.8 dB
Main lobe direction = 0.0 deg.
Angular width (3 dB) = 8.9 deg.
Side lobe level = -26.4 dB

H-Plane

Farfield Gain Abs (Phi=90)

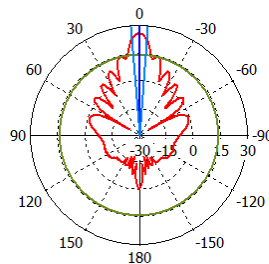


Theta / Degree vs. dB

farfield (f=49) [1]

Frequency = 49
Main lobe magnitude = 25.8 dB
Main lobe direction = 0.0 deg.
Angular width (3 dB) = 8.9 deg.
Side lobe level = -11.6 dB

51GHz E-Plane

Farfield Gain Abs (Phi=0)

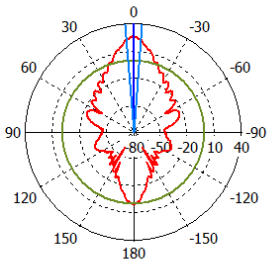


Theta / Degree vs. dB

farfield (f=51) [1]

Frequency = 51
Main lobe magnitude = 26.1 dB
Main lobe direction = 0.0 deg.
Angular width (3 dB) = 8.6 deg.
Side lobe level = -26.5 dB

H-Plane

Farfield Gain Abs (Phi=90)




Theta / Degree vs. dB

farfield (f=51) [1]

Frequency = 51
Main lobe magnitude = 26.1 dB
Main lobe direction = 0.0 deg.
Angular width (3 dB) = 8.6 deg.
Side lobe level = -11.4 dB

53GHz E-Plane

Farfield Gain Abs (Phi=0)

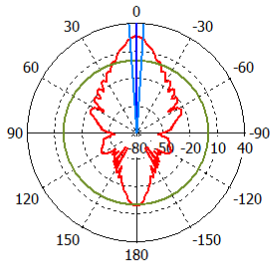


Theta / Degree vs. dB

farfield (f=53) [1]

Frequency = 53
Main lobe magnitude = 26.3 dB
Main lobe direction = 0.0 deg.
Angular width (3 dB) = 8.3 deg.
Side lobe level = -26.1 dB

H-Plane

Farfield Gain Abs (Phi=90)

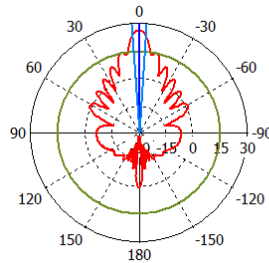


Theta / Degree vs. dB

farfield (f=53) [1]

Frequency = 53
Main lobe magnitude = 26.3 dB
Main lobe direction = 0.0 deg.
Angular width (3 dB) = 8.3 deg.
Side lobe level = -11.3 dB


57GHz E-Plane

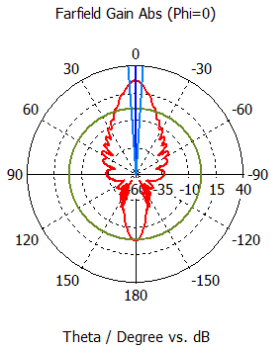

farfield (f=57) [1]

Frequency = 57
Main lobe magnitude = 26.7 dB
Main lobe direction = 0.0 deg.
Angular width (3 dB) = 7.9 deg.
Side lobe level = -25.5 dB


H-Plane

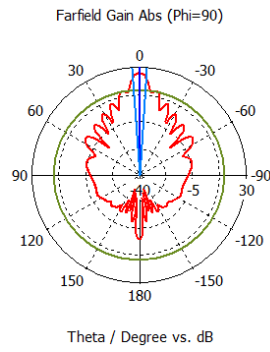

farfield (f=57) [1]

Frequency = 57
Main lobe magnitude = 26.7 dB
Main lobe direction = 0.0 deg.
Angular width (3 dB) = 7.8 deg.
Side lobe level = -11.0 dB


59.6GHz E-Plane

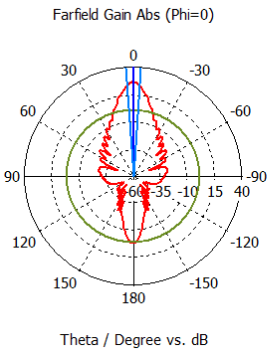

farfield (f=59.6) [1]

Frequency = 59.6
Main lobe magnitude = 27.0 dB
Main lobe direction = 0.0 deg.
Angular width (3 dB) = 7.7 deg.
Side lobe level = -25.4 dB

H-Plane

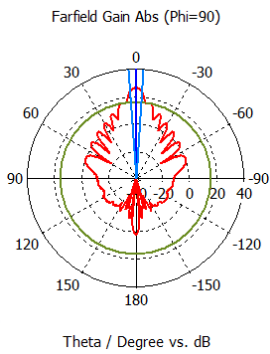

farfield (f=59.6) [1]

Frequency = 59.6
Main lobe magnitude = 27.0 dB
Main lobe direction = 0.0 deg.
Angular width (3 dB) = 7.4 deg.
Side lobe level = -10.7 dB