



#### Electrical

Frequency Range	2-6 GHz
VSWR	1.3 max
Average Power	200 Watts

#### Configuration

Waveguide Size	WRD200
Flange Type	Rectangular Cover, FPWRD200
Coax Connector	N Female
Body Geometry	Right Angle


#### Materials

Waveguide Body	Aluminum, grey or black painted
Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper

#### Mechanical & Environmental

Operating Temp	-40°C to 70°C
Connector Interface	MIL-STD-348
RoHS	Compliant

#### Typical Test Data

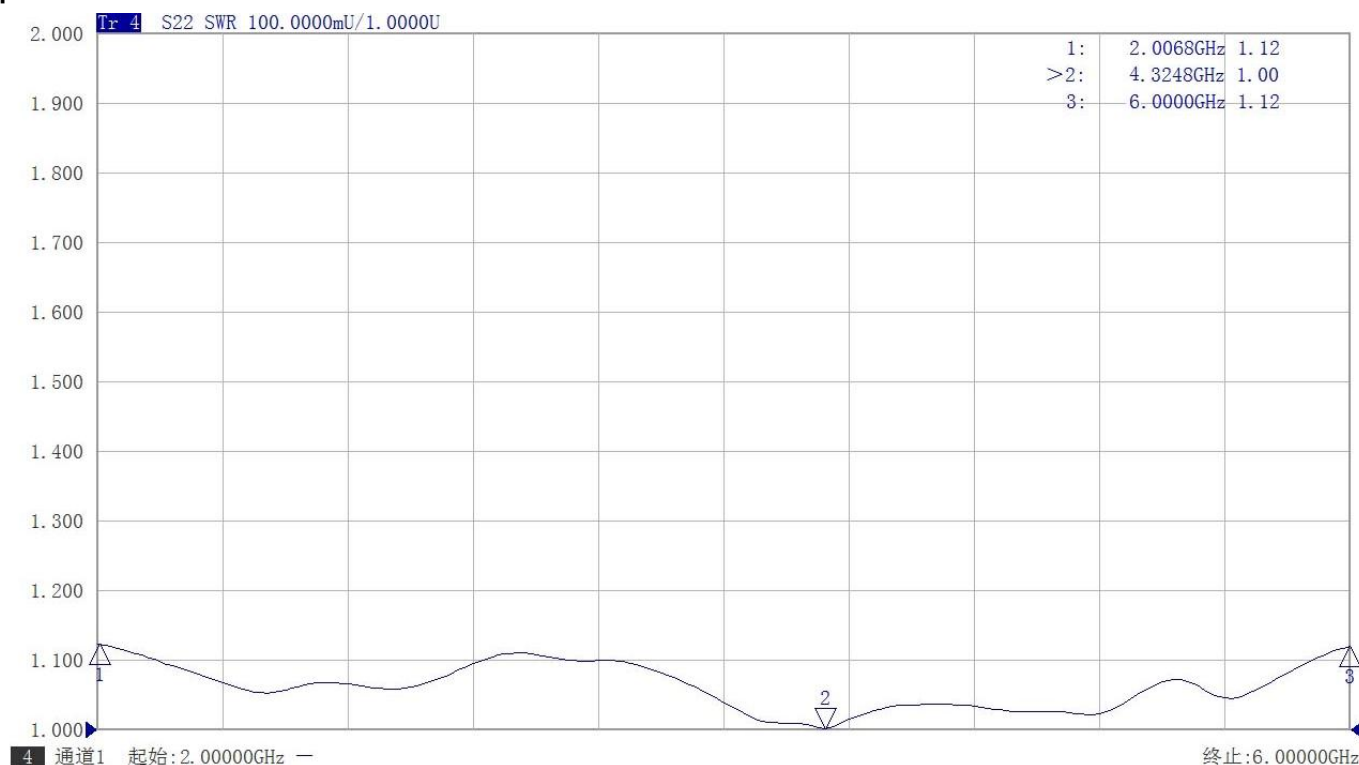



#### Dimensions(mm)

