


### Specifications

1	Center Frequency (F0)	12750MHz	
2	Pass Band Frequency	11000 ~ 14500 MHz	
3	Pass Band Insertion Loss	≤1.0dB	
4	Pass Band Ripple	≤0.5dB	
5	Pass Band Return Loss	≥20dB	
6	Stop Band Rejection	≥80dB @ DC ~ 9700MHz ≥60dB @ 9700 ~ 10100MHz	≥80dB @ 15500 ~ 20000MHz
7	Impedance	50 Ohms	
8	Power Handling	10W max	
9	Connectors	SMA-Female	
10	Surface Finish	Black Painted	
11	Temperature Range	-30℃ ~ +70℃	

### Dimensions(mm)

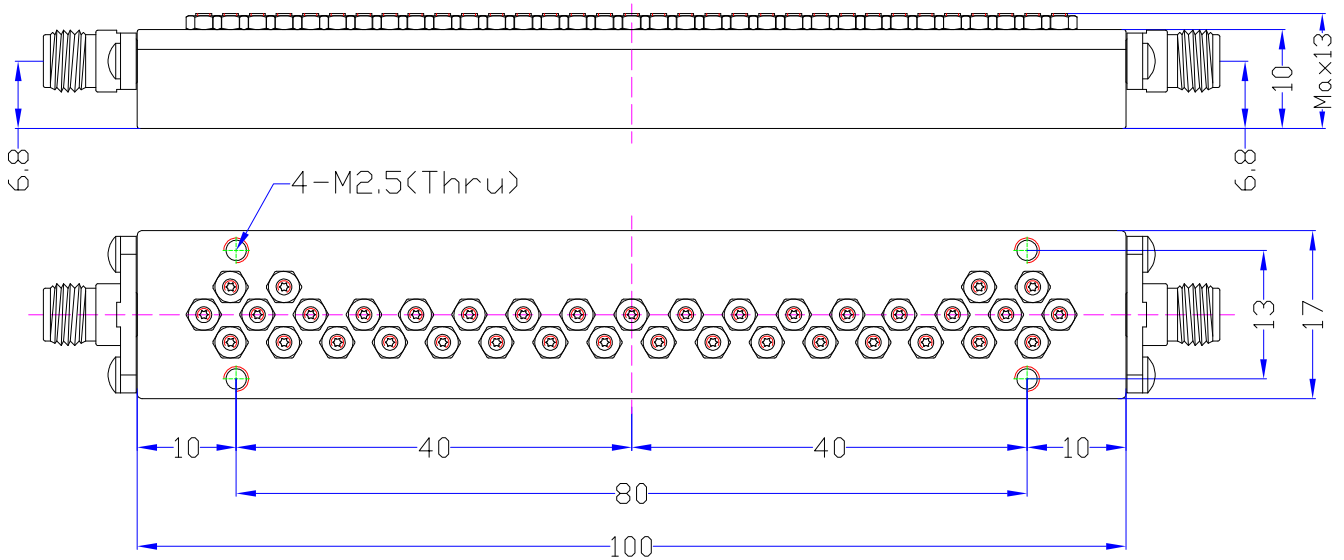

Typical Test Data

