20-26 GHz Band Pass Filter BPF-23000MK1

RVA 1

Specifications

1	Center Frequency(F0)	23000MHz	
2	Pass Band Frequency	20000 ~ 26000 MHz	
3	Pass Band Insertion Loss	≤1.05dB	
4	Pass Band Ripple	≤0.45dB	
5	Pass Band Return Loss	≥18dB	
6	Stop Band Rejection	≥80dB @ DC ~ 18050MHz ≥44dB @ 18050 ~ 19000MHz	≥53dB @ 27000 ~ 27550MHz ≥80dB @ 27550 ~ 57000MHz
7	Impedance	50 Ohms	
8	Power Handling	5W max	
9	Connectors	2.92mm Female	
10	Surface Finish	Black Painted	
11	Temperature Range	-30℃ ~ +70℃	
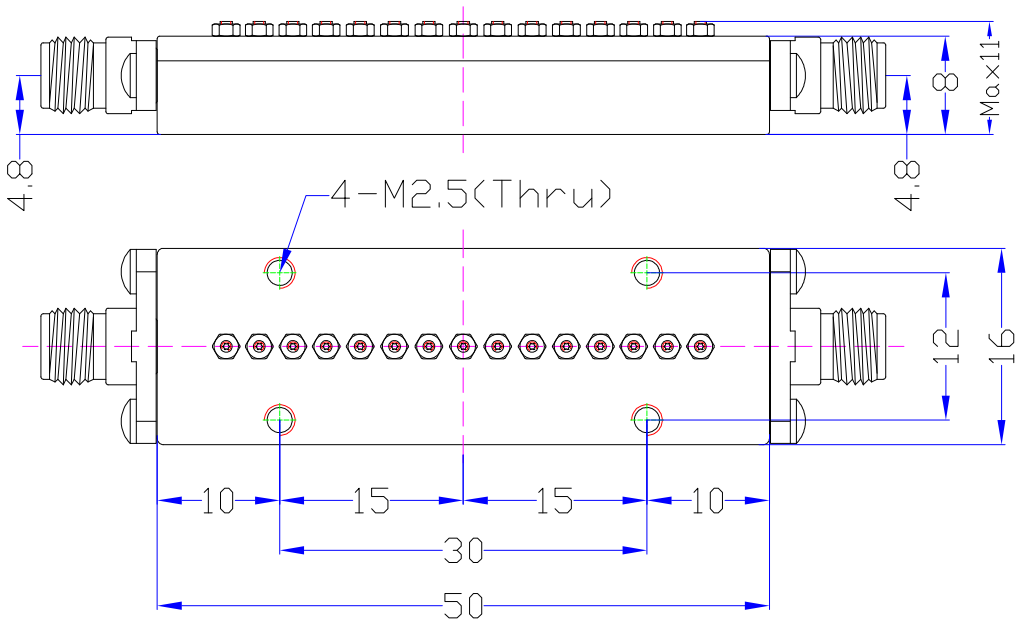
Dimensions(mm)