22-32 GHz Band Pass Filter BPF-27000MK1

RVA 1

Specifications

1	Center Frequency(F0)	27000MHz	
2	Pass Band Frequency	22000 ~ 33000 MHz	
3	Pass Band Insertion Loss	≤1.15dB	
4	Pass Band Ripple	≤0.56dB	
5	Pass Band Return Loss	≥17dB	
6	Stop Band Rejection	≥80dB @ DC ~ 20.1GHz ≥40dB @ 20.1 ~ 21GHz	≥41dB @ 33 ~ 33.65GHz ≥80dB @ 33.65 ~ 55GHz
7	Impedance	50 Ohms	
8	Power Handling	5W max	
9	Connectors	2.92mm Female	
10	Surface Finish	Black Painted	
11	Temperature Range	-30℃ ~ +70℃	
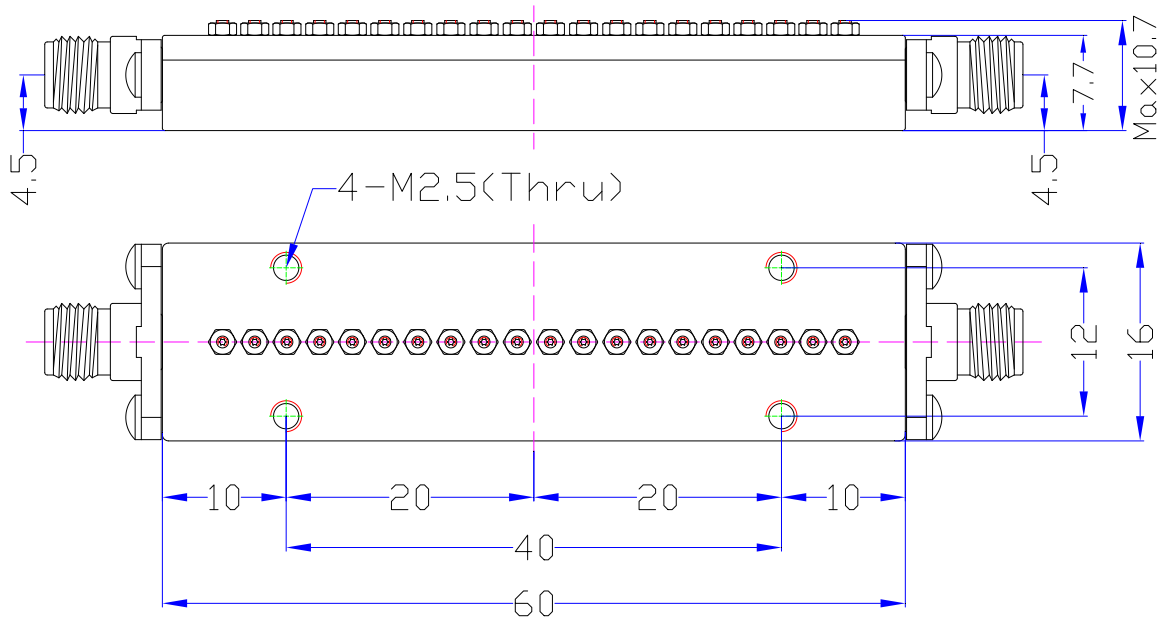
Dimensions(mm)