25-30 GHz Band Pass Filter BPF-27500MK1

RVA 1

Specifications

1	Center Frequency(F0)	27500MHz	
2	Pass Band Frequency	25000 ~ 30000 MHz	
3	Pass Band Insertion Loss	≤1.2dB	
4	Pass Band Ripple	≤0.48dB	
5	Pass Band Return Loss	≥20dB	
6	Stop Band Rejection	≥80dB @ DC ~ 23380MHz ≥50dB @ 23380 ~ 24000MHz	≥50dB @ 31000 ~ 31600MHz ≥80dB @ 31600 ~ 67000MHz
7	Impedance	50 Ohms	
8	Power Handling	5W max	
9	Connectors	2.92mm Female	
10	Surface Finish	Black Painted	
11	Temperature Range	-30℃ ~ +70℃	
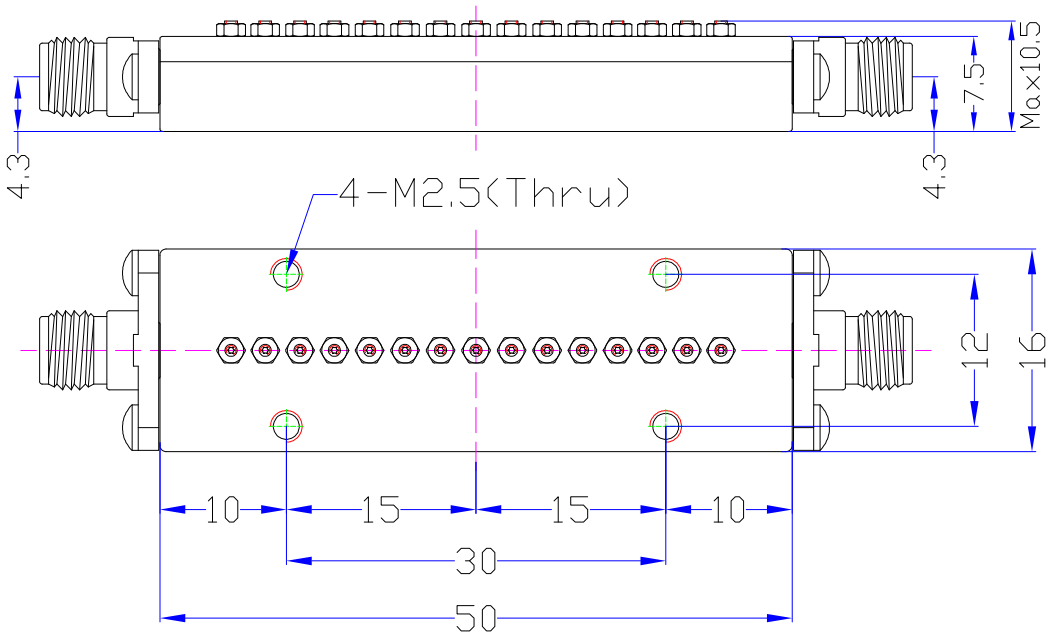
Dimensions(mm)