25-40 GHz Band Pass Filter BPF-32500MK2

RVA 1

Specifications

1	Center Frequency(F0)	32500MHz	
2	Pass Band Frequency	25000 ~ 40000 MHz	
3	Pass Band Insertion Loss	≤1.05dB	
4	Pass Band Ripple	≤0.44dB	
5	Pass Band Return Loss	≥17dB	
6	Stop Band Rejection	≥80dB @ DC ~ 22.6GHz ≥31dB @ 22.6 ~ 24GHz	≥31dB @ 41 ~ 42.4GHz ≥80dB @ 42.4 ~ 53GHz
7	Impedance	50 Ohms	
8	Power Handling	5W max	
9	Connectors	2.92mm Female	
10	Surface Finish	Black Painted	
11	Temperature Range	-30℃ ~ +70℃	
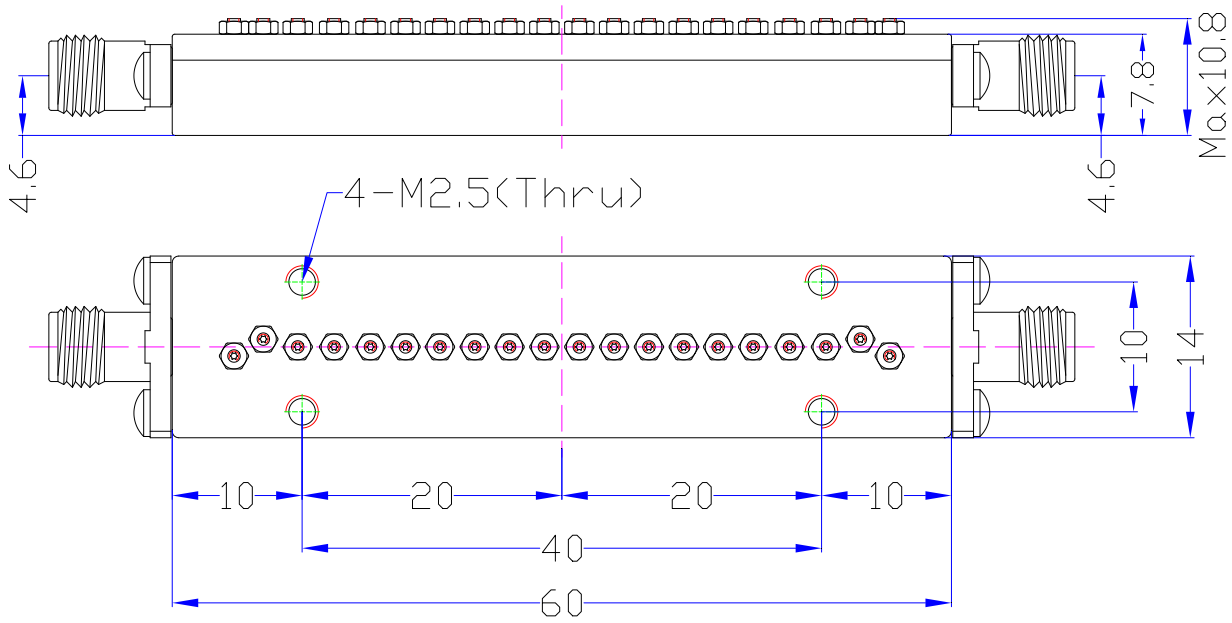
Dimensions(mm)