


Specifications

1	Pass Band Frequency	1 ~ 9GHz
2	Pass Band Insertion Loss	≤1.5dB
3	Pass Band VSWR	≤1.5
4	Stop Band Rejection	≥50dB @ DC ~ 0.78GHz ≥50dB @ 10.2 ~ 18GHz
5	Impedance	50 Ohms
6	Power Handling	10W max
7	Connectors	SMA-Female
8	Surface Finish	Black Painted
9	Temperature Range	-30℃ ~ +70℃

Dimensions(mm)

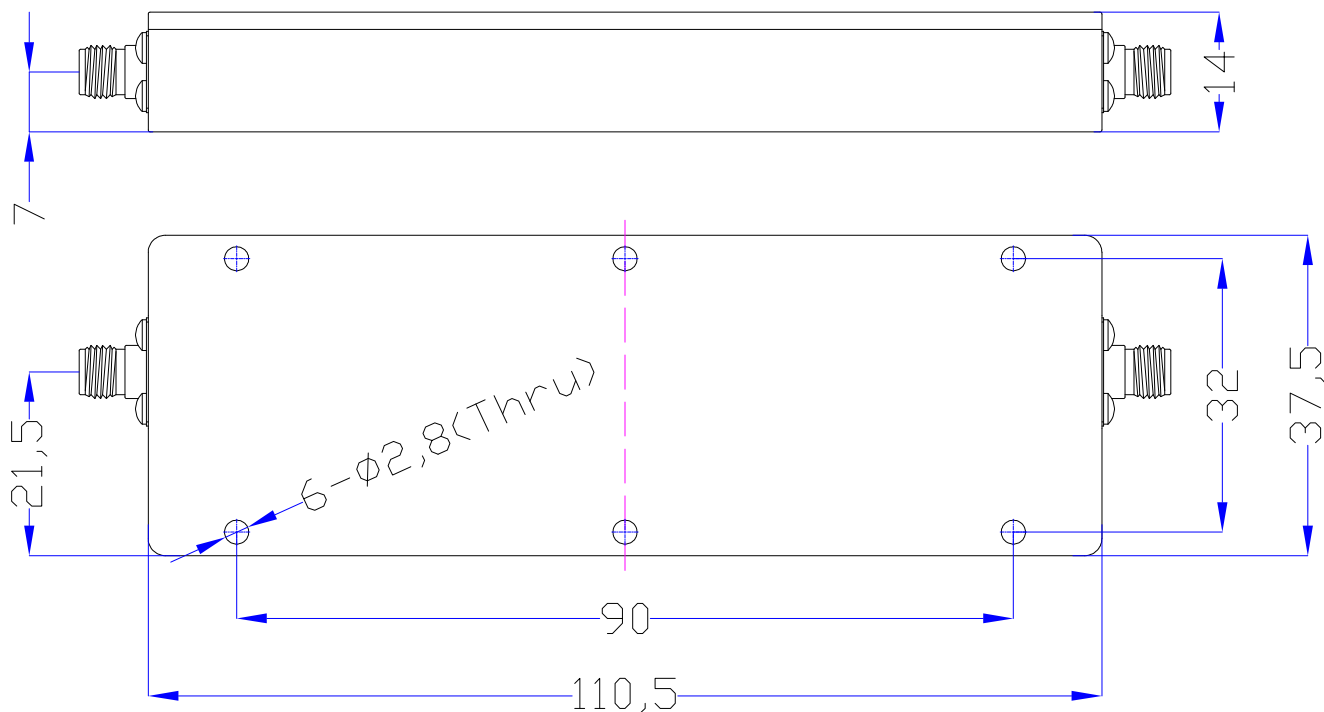

Typical Test Data

