


Specifications

1	Pass Band Frequency	DC-5150&5290-6750
2	Stop Band Frequency	5170-5270MHz
3	Pass Band Insertion Loss	≤2.2dB
4	Return Loss	≥10dB @ DC-5150&5290-6750
5	Stop Band Attenuation	≥50dB @ 5170-5270MHz
6	Impedance	50 ohms
7	Power	≤20W
8	Connectors	SMA-Female
9	Surface Finish	Black Paint
10	Temperature Range	0°C ~ +55°C

Dimensions (Unit: mm)

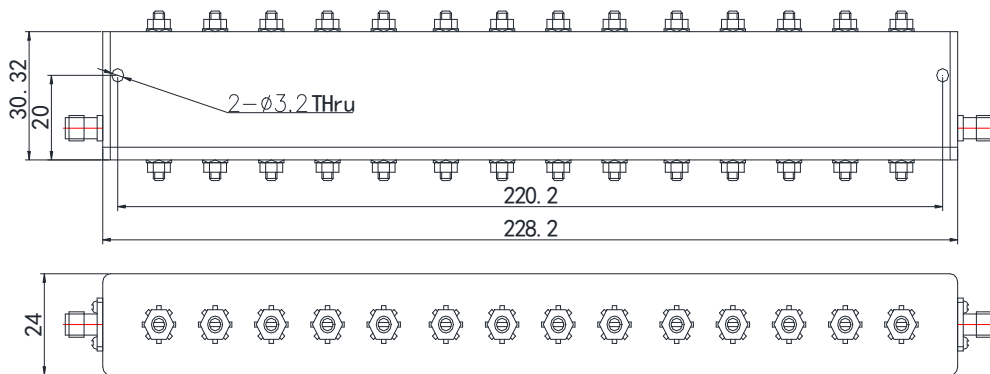

Typical test data

