


Specifications

1	Pass Band Frequency	DC ~ 760MHz , 813 ~ 3500MHz
2	Stop Band Frequency	770 ~ 803MHz
3	Pass Band Insertion Loss	≤3.0dB
4	Pass Band VSWR	≤1.9
5	Stop Band Attenuation	≥40dB
6	Impedance	50 ohms
7	Power	≤40W
8	Connectors	SMA-Female
9	Surface Finish	Black Paint
10	Temperature Range	-10℃ ~ +50℃

Dimensions (Unit: mm)

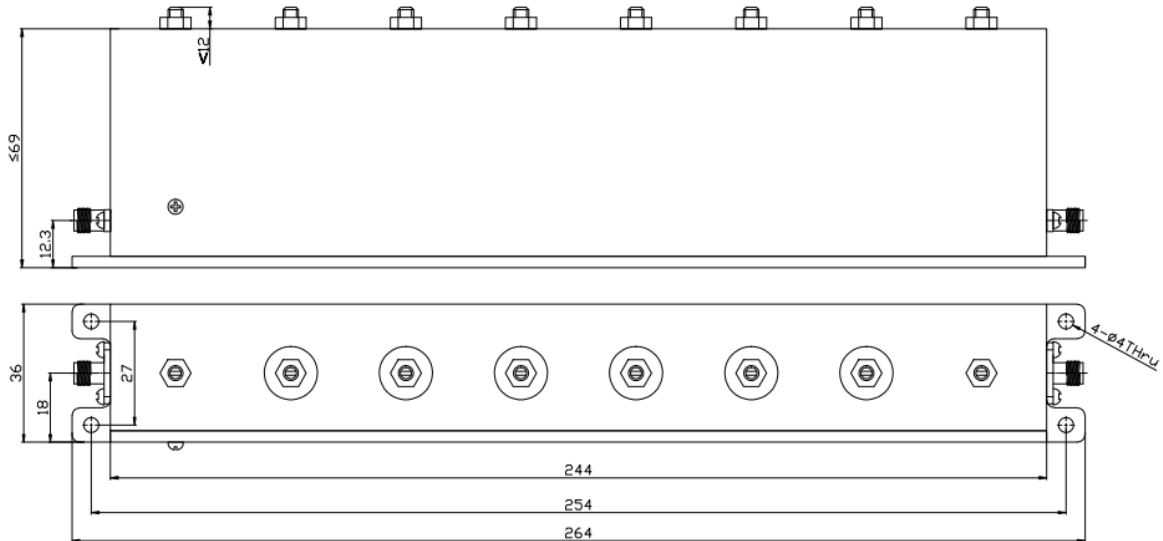

Typical Test Data

