

Inner DC Block

DB08S5A

10MHz-8GHz, SMA, 50 Volts



Rev 1


Electrical & Environmental

Impedance	50 ohm
Frequency Range	10 MHz-8 GHz
VSWR	1.2 max
Insertion Loss	0.3dB max
Voltage Rating	50 Volts max
Operating Temp	-55℃ to 100℃
RoHS	Compliant

Mechanical

Connector	SMA female to SMA male (other configurations available)
Connector Body	Passivated Stainless Steel
Center Contact	Gold plated beryllium copper/brass
Net Weight	About 5g

Dimensions(mm)

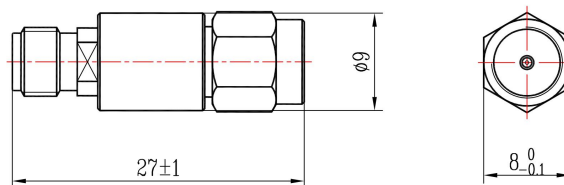

Typical Test Data

