

Inner DC Block

DB18N1A

9KHz-18GHz, N Type, 50 Volts



Rev 1


Electrical & Environmental

Impedance	50 ohm
Frequency Range	9 KHz-18 GHz
VSWR	1.3 max
Insertion Loss	0.9dB max
Voltage Rating	50 Volts max
Operating Temp	-55℃ to 100℃
RoHS	Compliant

Mechanical


Connector	N female to N male (other configurations available)
Connector Body	Ternary alloy plated brass
Center Contact	Gold plated beryllium copper/brass
Net Weight	About 50g

Dimensions(mm)

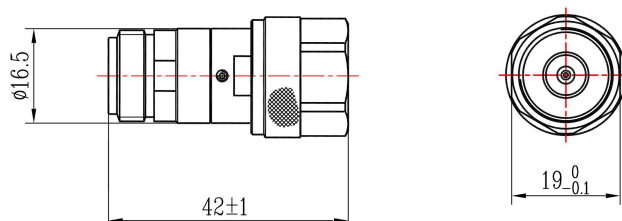

Typical Test Data

9KHz-20MHz

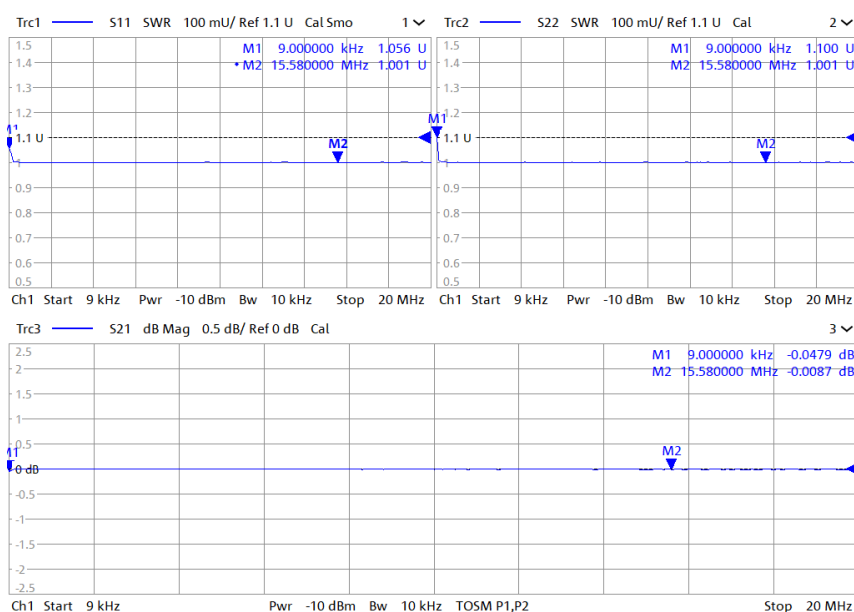

10MHz-18GHz

