




Electrical & Environmental

Impedance	50 ohm
Frequency Range	9 KHz-26.5 GHz
VSWR	1.55 max
Insertion Loss	1.0dB max
Voltage Rating	50 Volts max
Operating Temp	-55°C to 100°C
RoHS	Compliant

Mechanical


Connector	SMA female to SMA male (other configurations available)
Connector Body	Passivated Stainless Steel
Center Contact	Gold plated beryllium copper/brass
Net Weight	About 5g

Dimensions(mm)

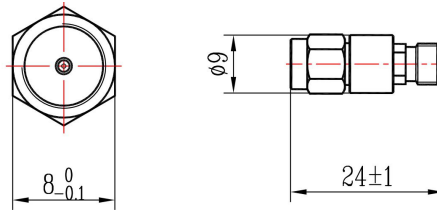

Typical Test Data

9KHz-20MHz

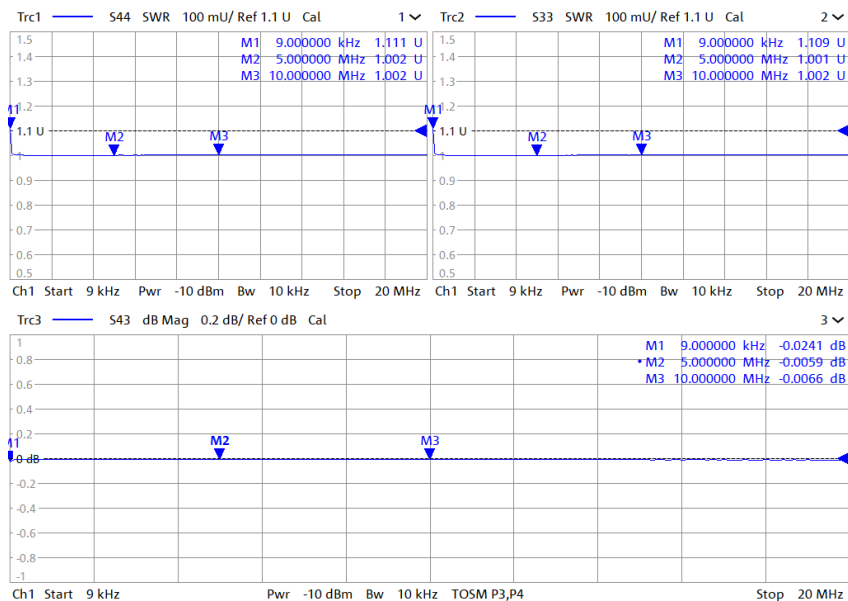

# 10MHz-26.5GHz

