




### Electrical & Environmental

|                 |                 |
|-----------------|-----------------|
| Impedance       | 50 ohm          |
| Frequency Range | 10 MHz-26.5 GHz |
| VSWR            | 1.3 max         |
| Insertion Loss  | 0.6dB max       |
| Voltage Rating  | 250 Volts max   |
| Operating Temp  | -55℃ to 100℃    |
| RoHS            | Compliant       |

### Mechanical

|                |                                                         |
|----------------|---------------------------------------------------------|
| Connector      | SMA female to SMA male (other configurations available) |
| Connector Body | Passivated Stainless Steel                              |
| Center Contact | Gold plated beryllium copper/brass                      |
| Net Weight     | About 5g                                                |

### Dimensions(mm)

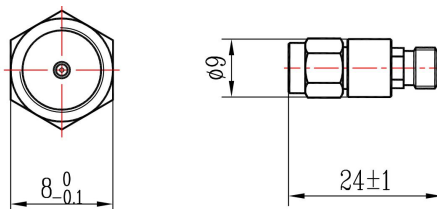

### Typical Test Data

