

# Inner DC Block

# DB5050A

50kHz-50GHz, 2.4mm, 50 Volts



Rev 1


## Electrical & Environmental

Impedance	50 ohm
Frequency Range	50 kHz-50 GHz
VSWR	1.45 max
Insertion Loss	1.0dB max
Voltage Rating	50 Volts max
Operating Temp	-55°C to 125°C
RoHS	Compliant

## Mechanical


Connector	2.4mm
Connector Body	Passivated Stainless Steel
Center Contact	Gold plated beryllium copper
Net Weight	Approx 5g

## Dimensions(mm)

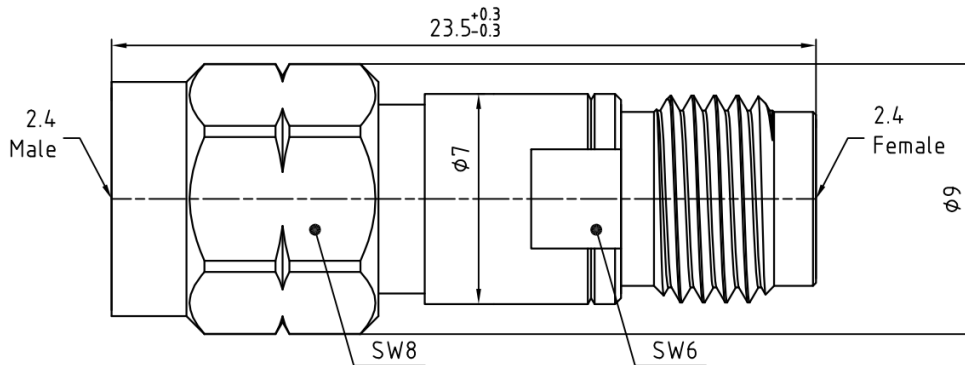



Typical Test Data

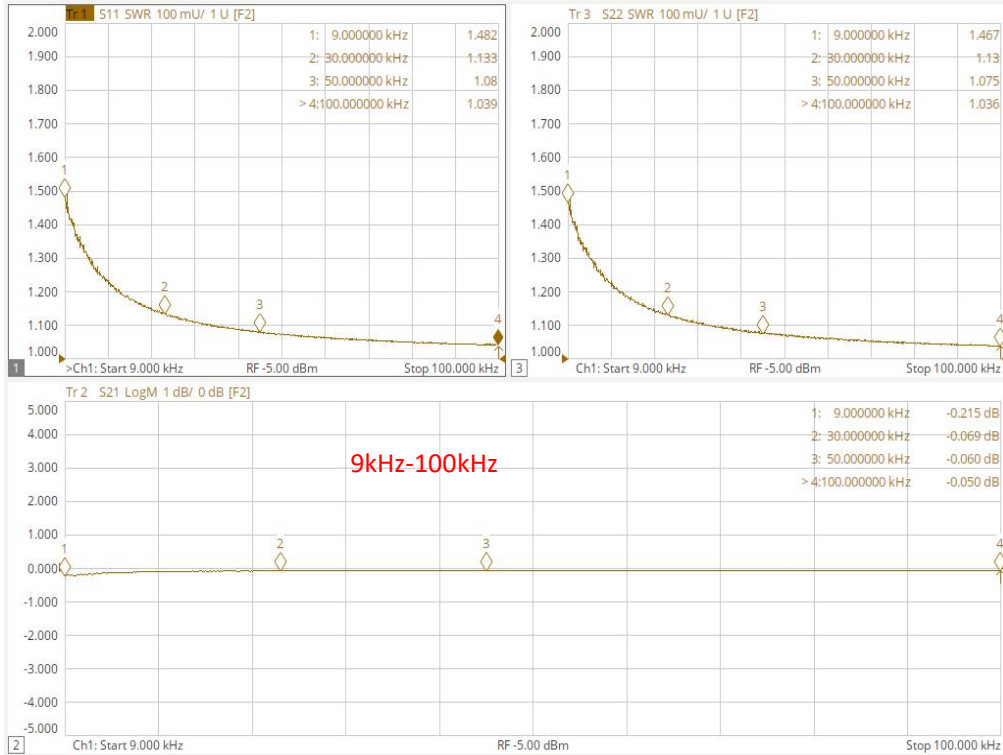

# Inner DC Block

# DB5050A



50kHz-50GHz, 2.4mm, 50 Volts

## Typical Test Data

