



Directional Coupler, 0.5 to 6 GHz, 30 dB, SMA Female, 50 Watts

Rev 1


Electrical & Environmental

Frequency Range	0.5-6 GHz
Coupling Factor	30±1.0 dB
Coupling Sensitivity	±1.0 dB
Insertion Loss	≤0.6 dB (Exclusive of coupling loss 0.01 dB)
VSWR	≤1.3
Directivity	≥16 dB
Impedance	50 Ohms
Input Power (CW)	50 Watts max
Operating temperature	-40°C ~ +85°C

Mechanical

Connector	SMA female*3 Body: stainless steel; Center contact: Gold plated BeCu
Housing	Black painting, aluminum alloy housing
Weight	70g



Dimensions(Unit: mm/[inch], Tolerance: ±0.5mm)

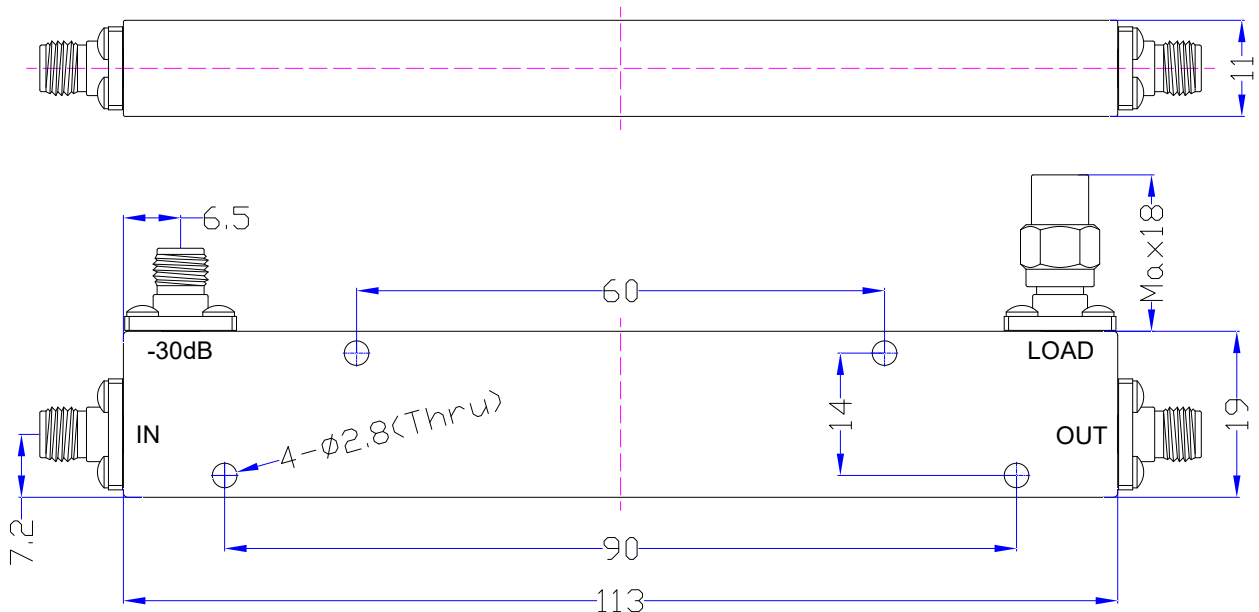



Directional Coupler, 0.5 to 6 GHz, 30 dB, SMA Female, 50 Watts

Typical Test Data

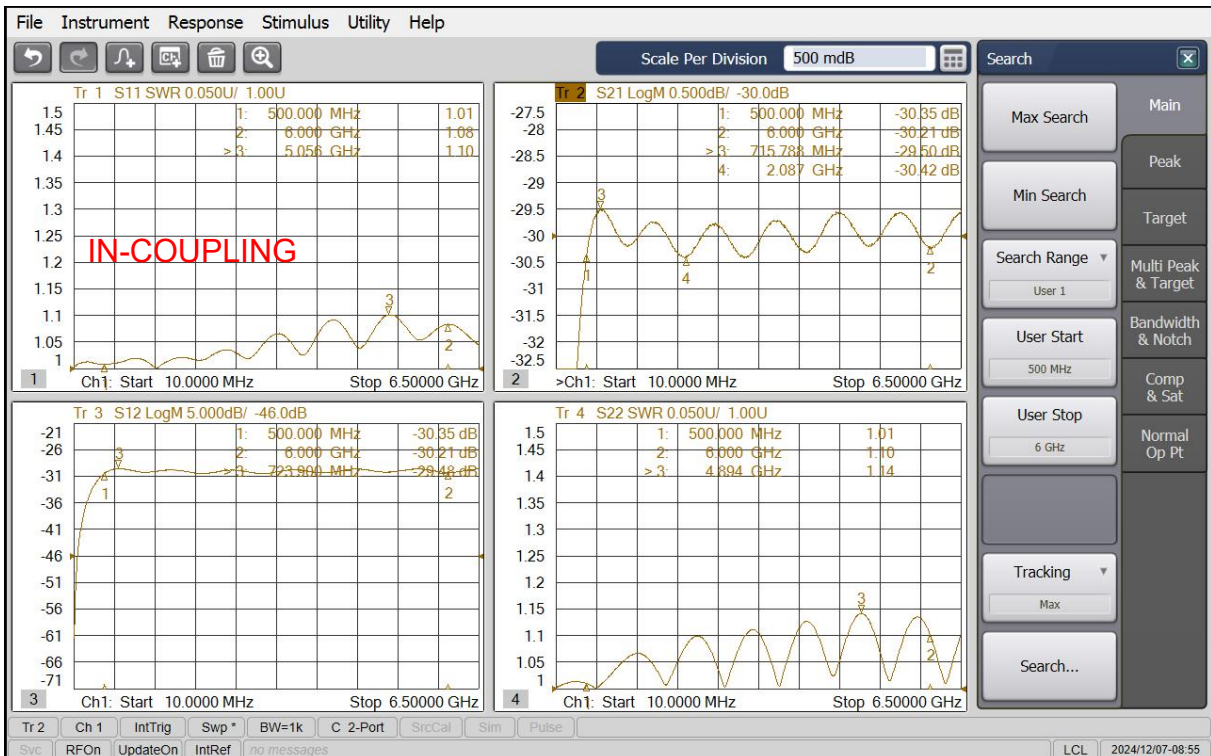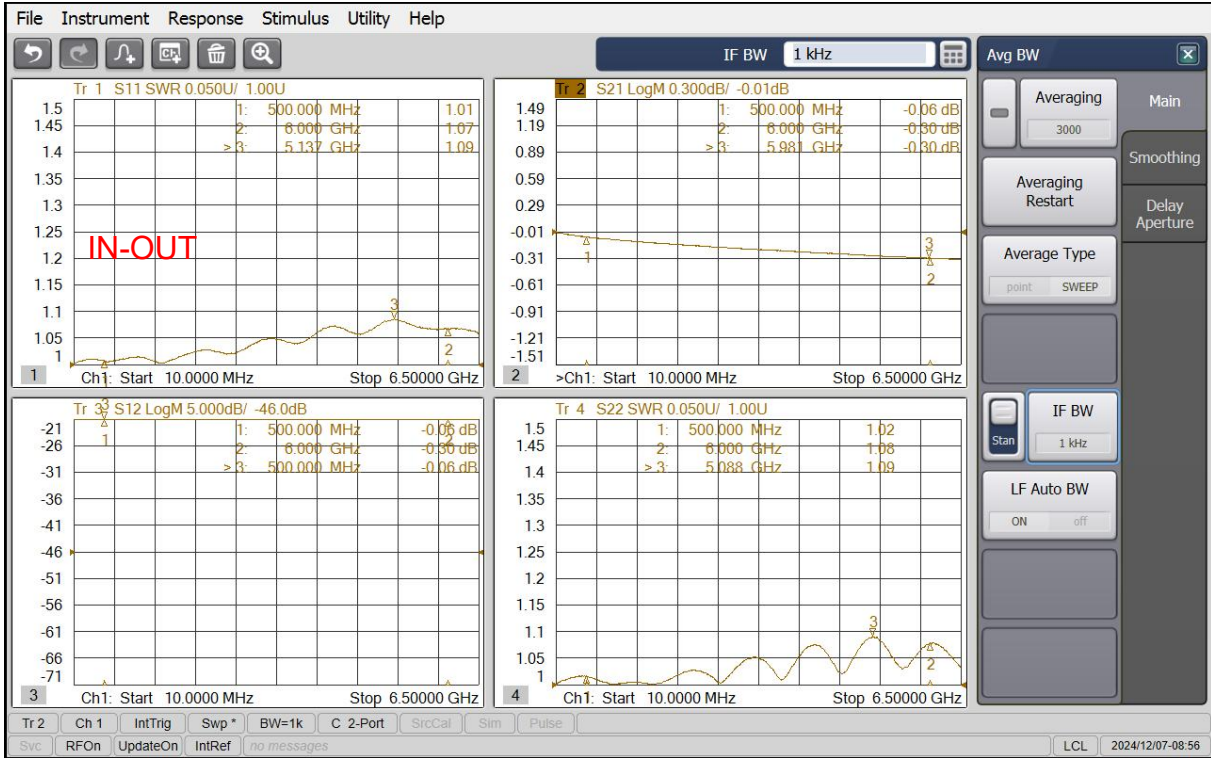



Directional Coupler, 0.5 to 6 GHz, 30 dB, SMA Female, 50 Watts

