



**Directional Coupler, 0.5 to 40 GHz, 20 dB, 2.92mm Female, 20 Watts**

Rev 1


**Electrical & Environmental**

Frequency Range	0.5-40 GHz
Coupling Factor	20 ±1.0 dB
Coupling Sensitivity	≤±1.2 dB
Insertion Loss	≤2.6 dB (Exclusive of coupling loss 0.04 dB)
VSWR	≤1.7:1
Directivity	≥10 dB
Impedance	50 Ohms
Input Power (CW)	20 Watts max
Operating temperature	-40°C ~ +85°C

**Mechanical**

Connector	2.92mm female*3 Body: stainless steel; Center contact: Gold plated BeCu
Housing	Grey or black painting, aluminum alloy housing
Net weight	80g



**Dimensions**(Unit: mm/[inch], Tolerance: ±0.5mm)

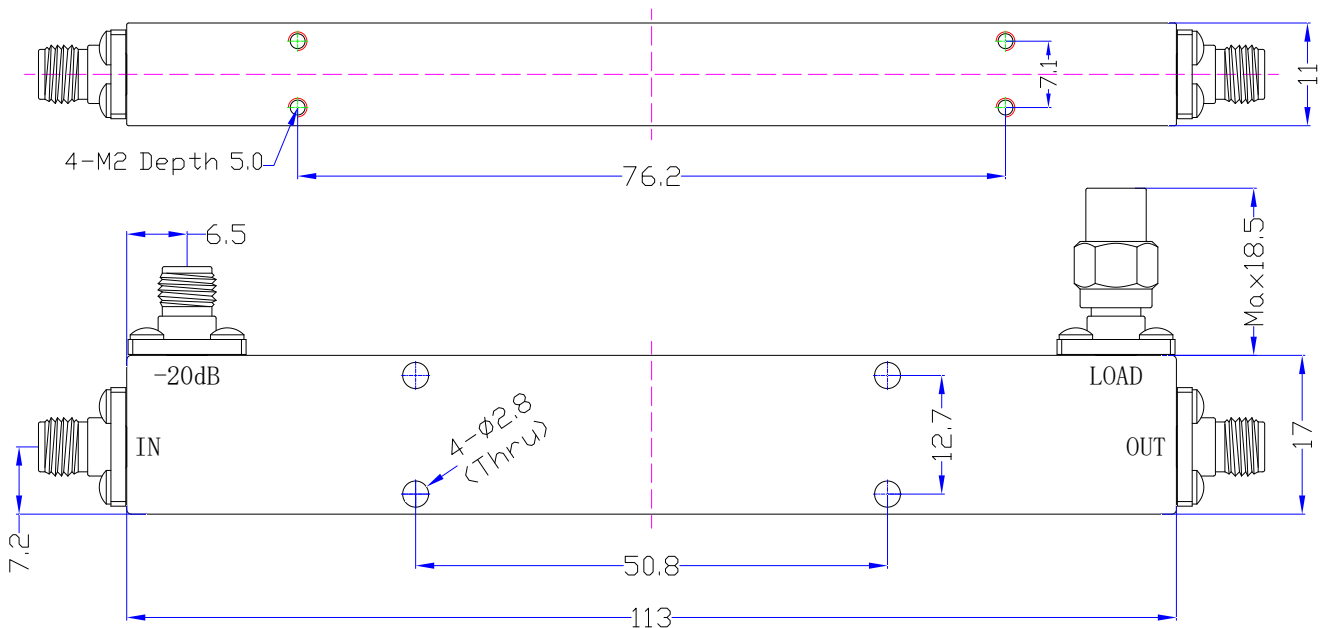



Directional Coupler, 0.5 to 40 GHz, 20 dB, 2.92mm Female, 20 Watts

Typical Test Data

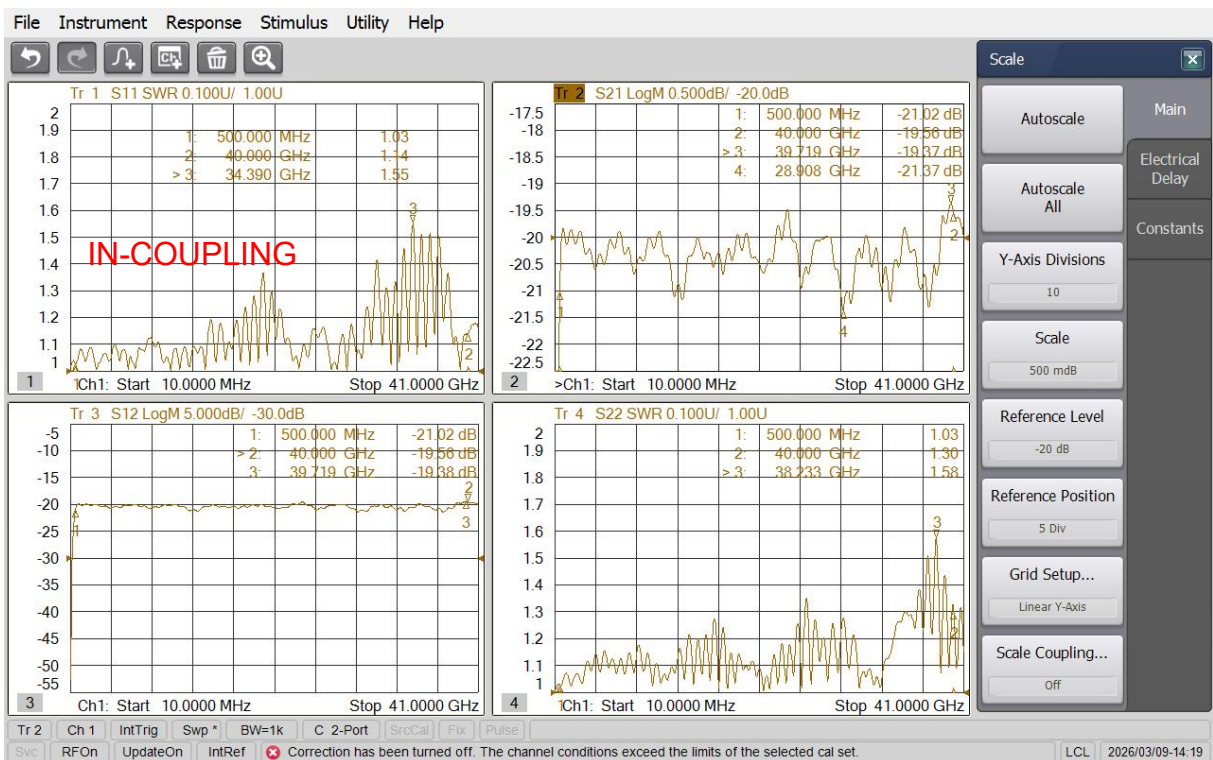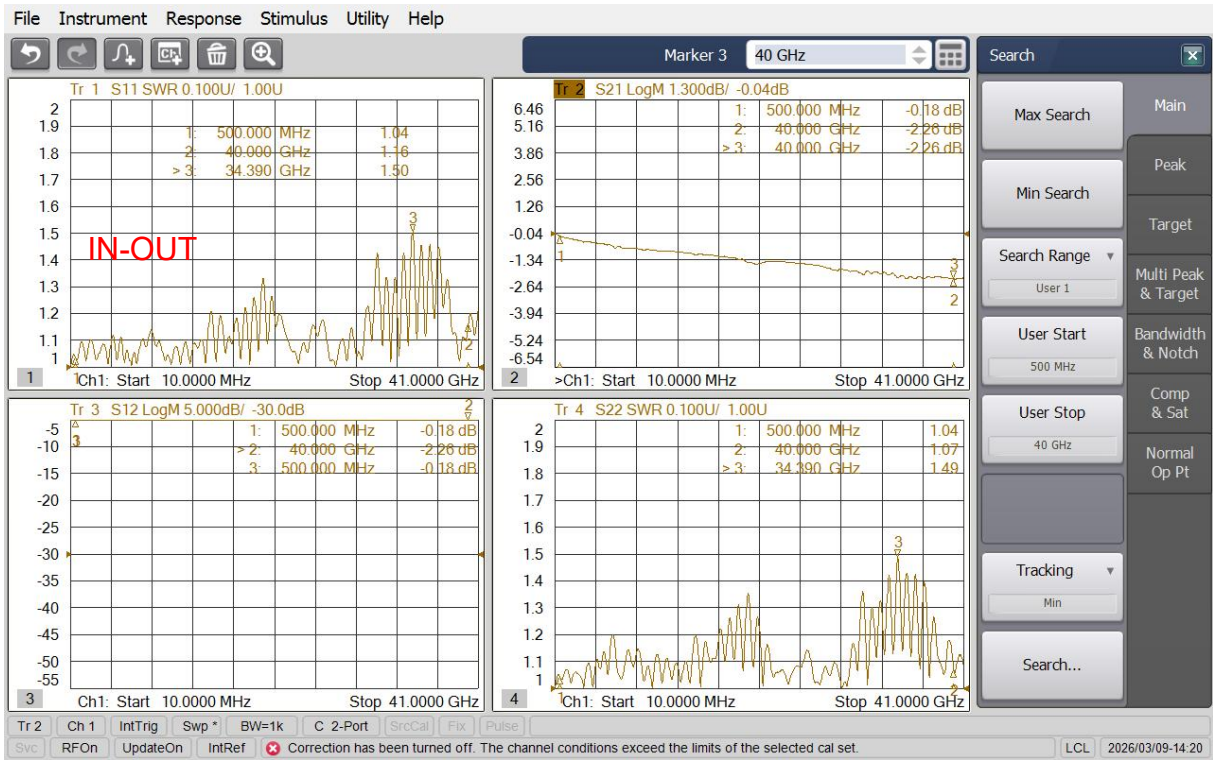



Directional Coupler, 0.5 to 40 GHz, 20 dB, 2.92mm Female, 20 Watts

