



DC0118N-10

Directional Coupler, 1 to 18 GHz, 10 dB, N Female, 50 Watts

Rev 1


Electrical & Environmental

Frequency Range	1-18 GHz
Coupling Factor	10 ±1.0 dB
Coupling Sensitivity	≤±1.0 dB
Insertion Loss	≤1.2 dB (Exclusive of coupling loss 0.46 dB)
VSWR	≤1.6
Directivity	≥12 dB
Impedance	50 Ohms
Input Power (CW)	50 Watts max
Operating temperature	-40°C ~ +85°C

Mechanical

Connector	N female*3 Body: stainless steel; Center contact: Gold plated BeCu
Housing	Grey or black painting, aluminum alloy housing

Dimensions (Unit: mm/[inch], Tolerance: ±0.5mm)

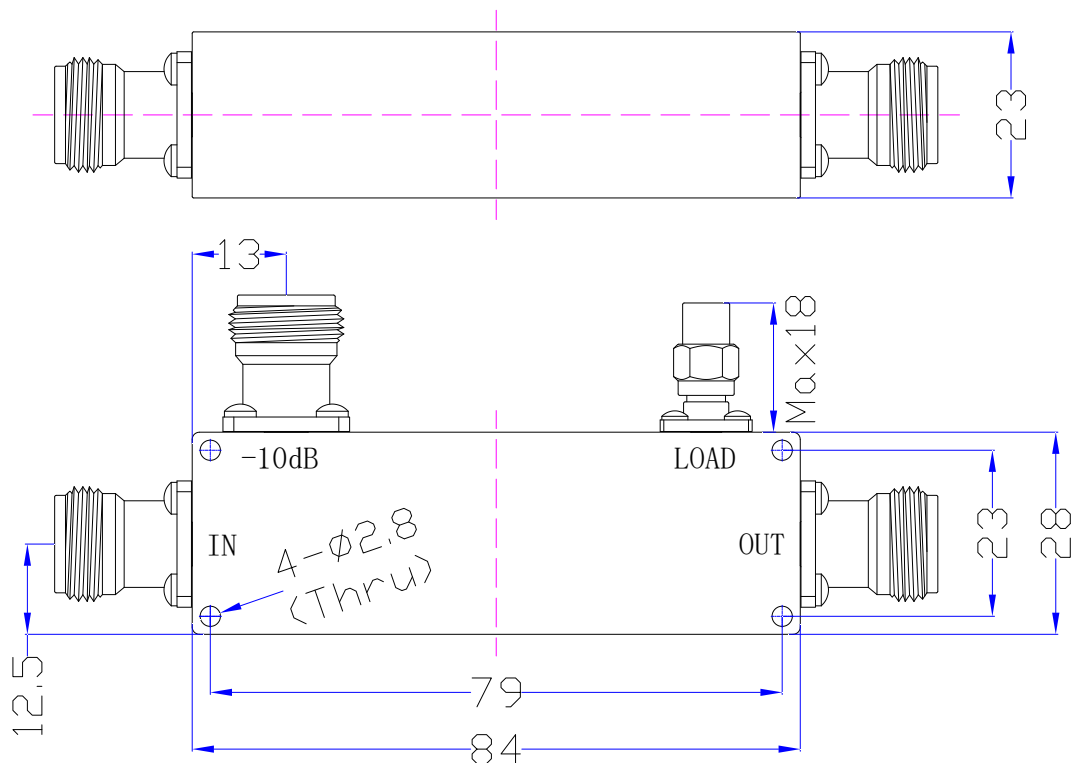





DC0118N-10

Directional Coupler, 1 to 18 GHz, 10 dB, N Female, 50 Watts

Rev 1

Typical Test Data

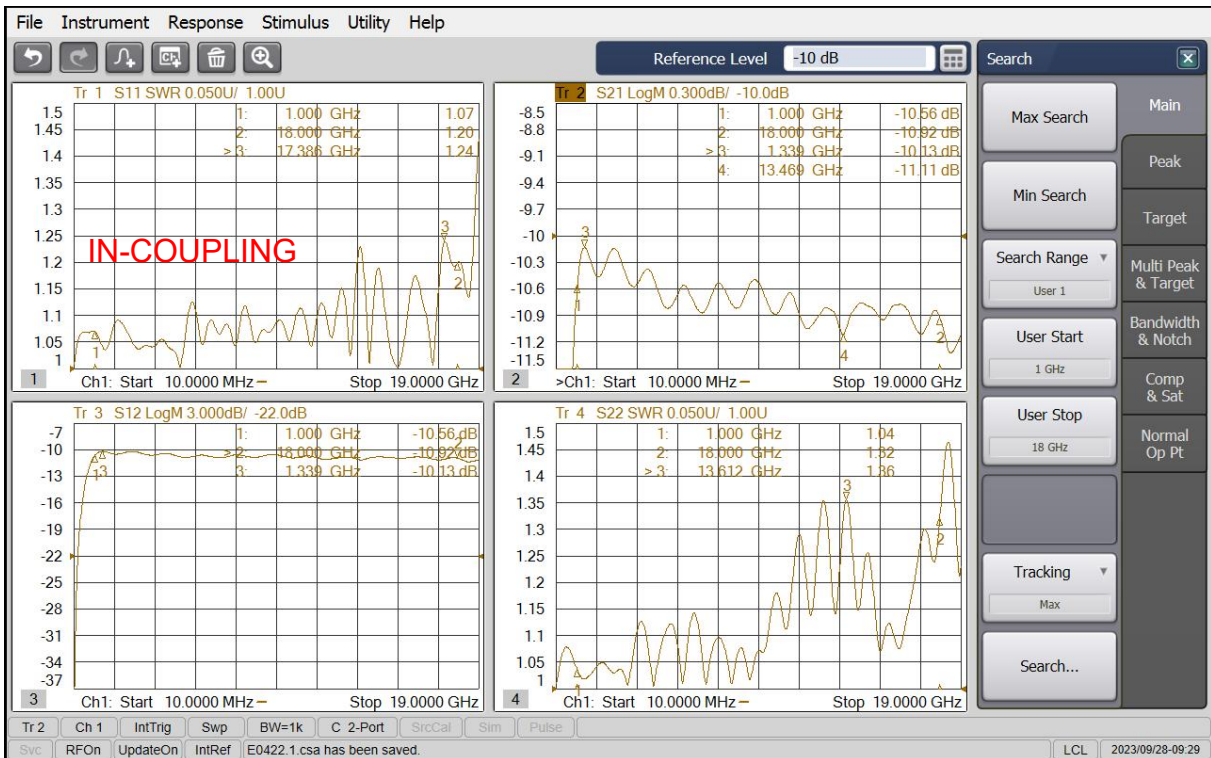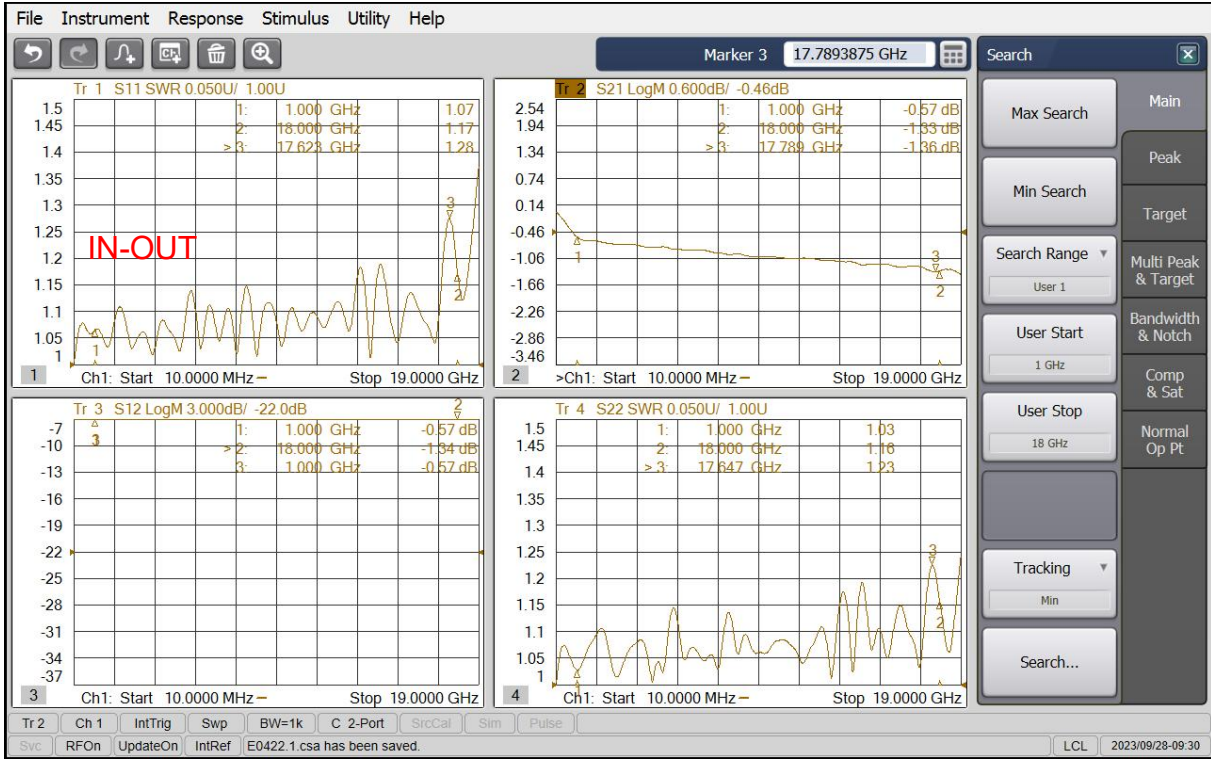



Directional Coupler, 1 to 18 GHz, 10 dB, N Female, 50 Watts

