



## Directional Coupler, 2 to 18 GHz, 10 dB, SMA Female, 20 Watts

Rev 1


### Electrical & Environmental

Frequency Range	2-18 GHz
Coupling	10±1.0 dB
Coupling Flatness	≤±1.0 dB
Insertion Loss	≤0.8 dB (Exclusive of coupling loss 0.46 dB)
VSWR	≤1.5:1
Directivity	≥15 dB
Impedance	50 Ohms
Input Power (CW)	20 Watts max
Operating temperature	-40℃ ~ +85℃

### Mechanical

Connector	SMA female*3 Body: stainless steel; Center contact: Gold plated BeCu
Housing	Black painting, aluminum alloy housing
Net weight	35g

### Dimensions(Unit: mm/[inch], Tolerance: ±0.5mm)

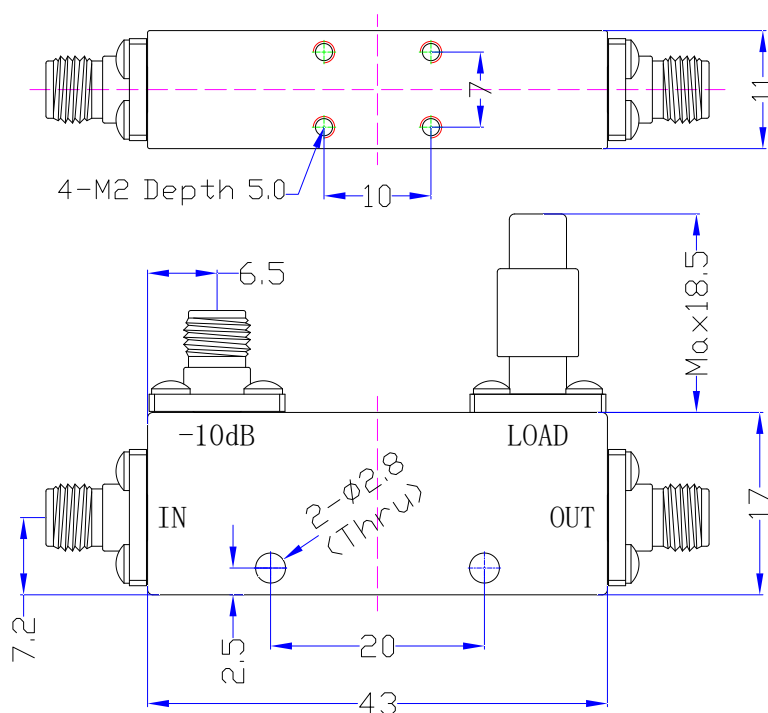



## Directional Coupler, 2 to 18 GHz, 10 dB, SMA Female, 20 Watts

Rev 1

## Typical Test Data

