


Specifications

1	Pass Band Frequency	12.5~24.5 GHz
2	Pass Band Insertion Loss	≤2.0dB @ 12.5~13 GHz ≤1.0dB @ 13~24.5 GHz
3	Pass Band VSWR	≤1.6
4	Stop Band Attenuation	≥60dB @ DC~11.4GHz
5	Impedance	50 ohms
6	Power	≤15W
7	Connectors	SMA-Female
8	Surface Finish	Black Paint
9	Temperature Range	-55°C ~ +85°C
10	Weight	20 g

Dimensions (Unit: mm)


Typical Test Data

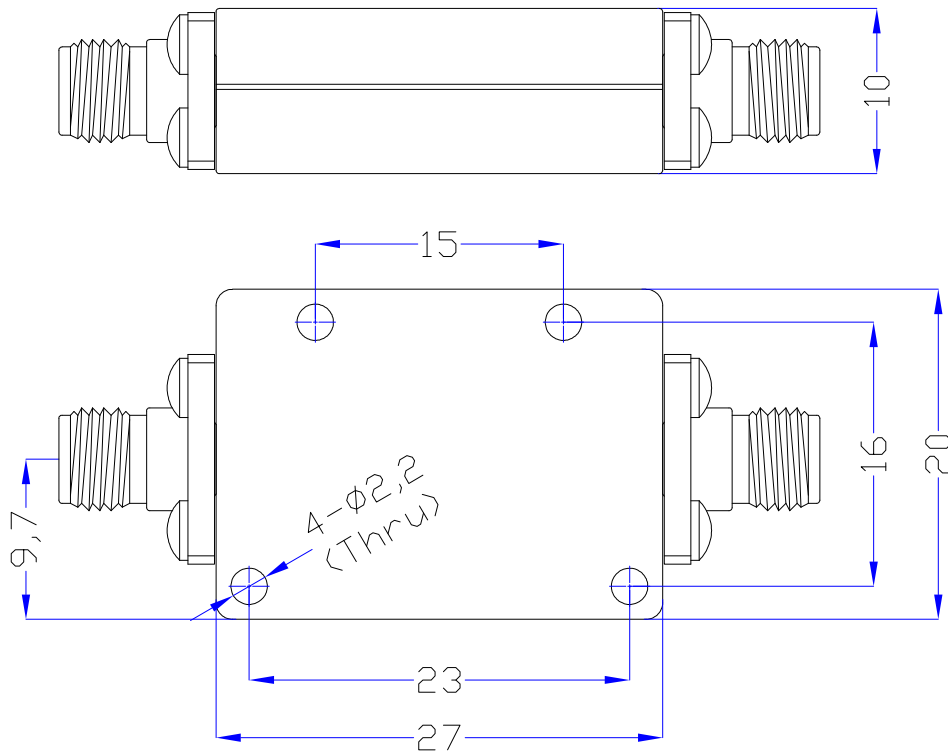