


Specifications

1	Pass Band Frequency	DC ~11 GHz
2	Pass Band Insertion Loss	≤1.0dB @ DC ~ 10.8GHz ≤1.5dB @ 10.8 ~ 11GHz
3	Pass Band VSWR	≤1.5
4	Stop Band Rejection	≥50dB @ 12.1 ~ 19GHz
5	Impedance	50 Ohms
6	Power Handling	15W Max.
7	Connectors	SMA Female
8	Surface Finish	Black Painted
9	Temperature Range	-55°C ~ +85°C
10	Dimensions	24*19*10mm
11	Net weight	About 15g

Dimensions (Unit: mm, Tolerance: ±0.3mm)

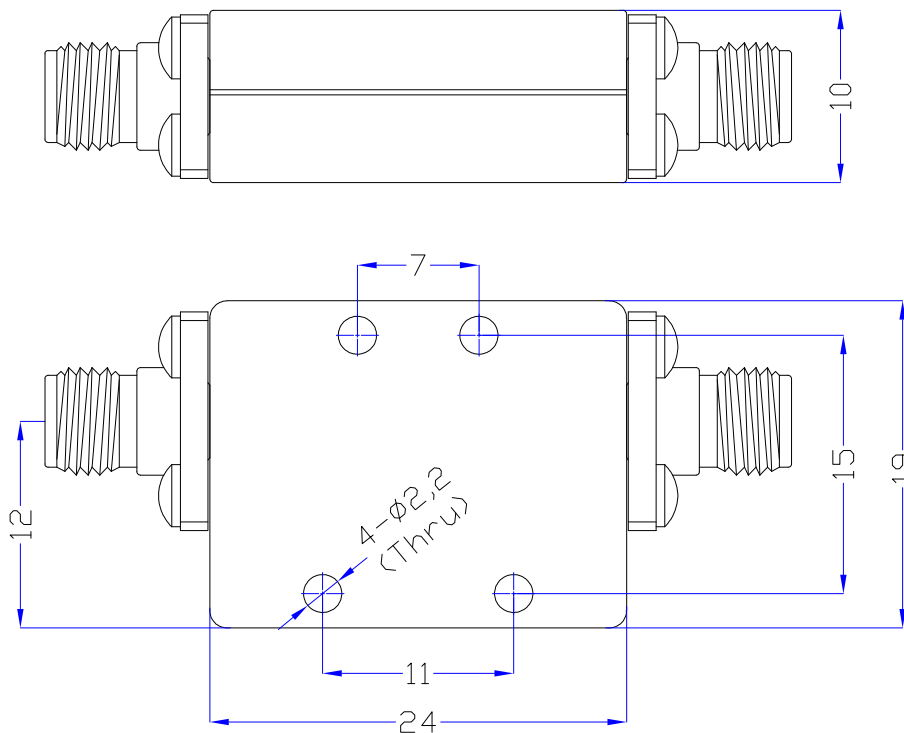

Typical Test Data

