


Specifications

1	Pass Band Frequency	DC ~ 18GHz
2	Pass Band Insertion Loss	≤1.0dB @ DC~17.3GHz ≤3.0dB @ 17.3~18GHz
3	Pass Band VSWR	≤1.6
4	Stop Band Rejection	≥50dB @ 19.1~26GHz
5	Impedance	50 Ohms
6	Power Handling	15W Max.
7	Connectors	SMA-Female
8	Surface Finish	Black Painted
9	Temperature Range	-55°C ~ +85°C
10	Net weight	About 15g

Dimensions (Unit: mm, Tolerance: ±0.3mm)

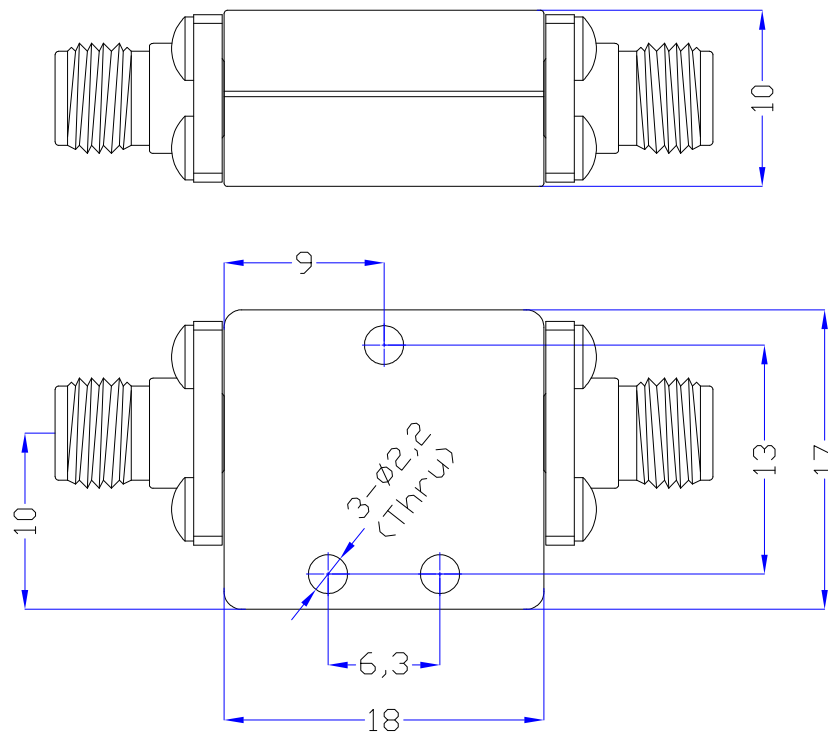

Typical Test Data

