


Specifications

1	Pass Band Frequency	DC ~ 3.0 GHz
2	Pass Band Insertion Loss	≤1.0dB @ DC ~ 2.9GHz ≤1.5dB @ 2.9 ~ 3.0GHz
3	Pass Band VSWR	≤1.3
4	Stop Band Rejection	≥60dB @ 3.52 ~ 10.0GHz
5	Impedance	50 Ohms
6	Power Handling	15W Max.
7	Connectors	SMA Female
8	Surface Finish	Black Painted
9	Temperature Range	-55°C ~ +85°C
10	Dimensions	44*24*10mm
11	Net weight	About 33g

Dimensions (Unit: mm, Tolerance: ±0.3mm)

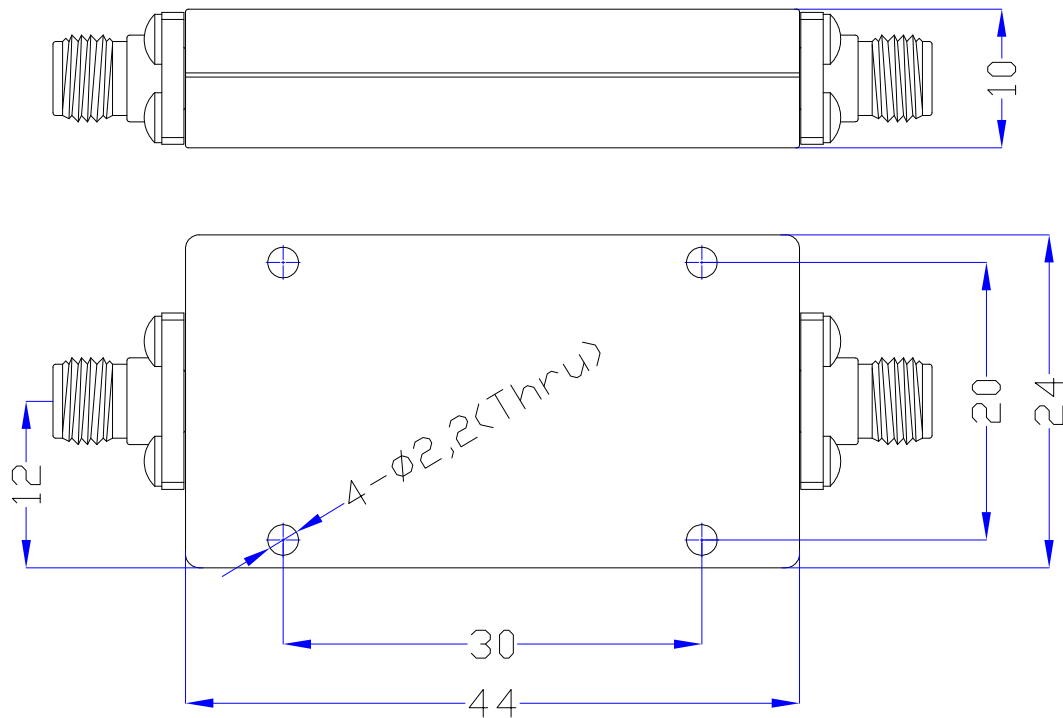

Typical Test Data

