


Specifications

1	Pass Band Frequency	DC ~ 7.5 GHz
2	Pass Band Insertion Loss	≤1.0dB @ DC~7.4 GHz ≤1.5dB @ 7.4~7.5 GHz
3	Pass Band VSWR	≤1.4
4	Stop Band Rejection	≥50dB @ 8.3 ~ 15.8GHz
5	Impedance	50 Ohms
6	Power Handling	15W max
7	Connectors	SMA-Female
8	Surface Finish	Black Painted
9	Temperature Range	-55°C ~ +85°C
10	Net weight	About 22g

Dimensions (Unit: mm, Tolerance: ±0.3mm)

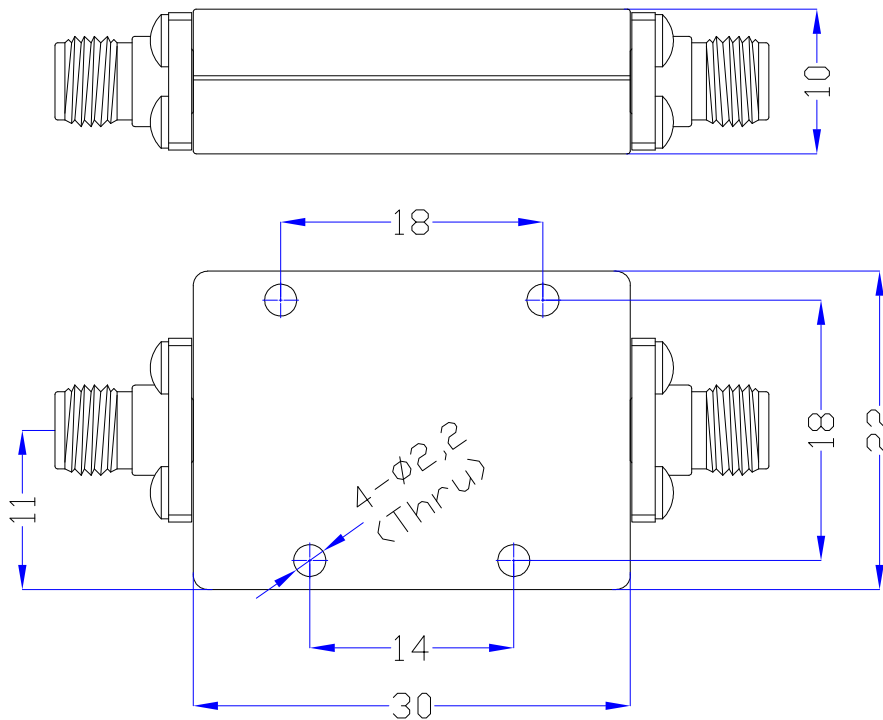

Typical Test Data

