


Tight Bend Triple-shielding Flexible Cable Assembly, Using MB260L

DC-50 GHz, 2.4mm Male to 2.4mm Male

MB260L-24M24M-L(L:Length)

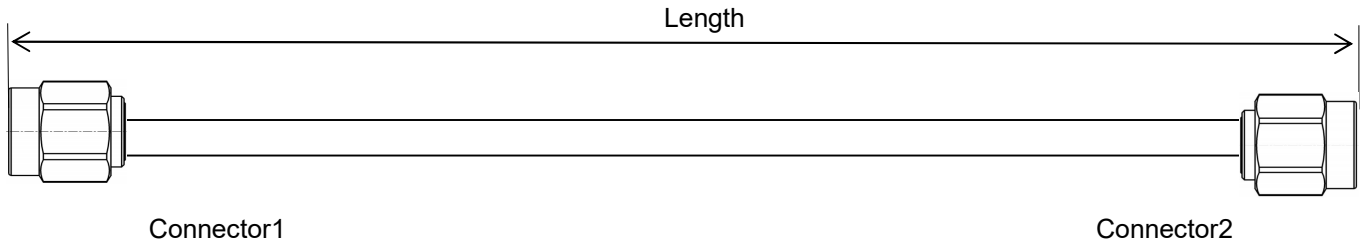


- Length can be in meter or in inch etc, e.g, MB260L-24M24M-1M. Standard length tolerance: $\pm 1.5\%$. Custom lengths and other connector types available.
- Length is measured from one connector end to the other connector end as shown above. For RA connectors, use the pin center-line.

Configuration

Connector 1	2.4mm male	Connector 2	2.4mm male
Body	Passivated stainless steel	Body	Passivated stainless steel
Center Contact	Gold plated BeCu	Center Contact	Gold plated BeCu
Cable Type	MB260L		

Cable Construction

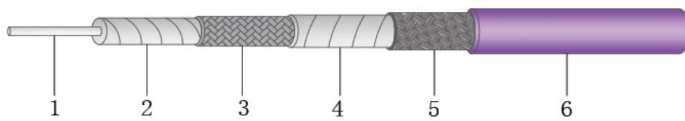

No.	Construction	Size (mm)	Materials
1	Center conductor	0.56	Silver plated copper
2	Dielectric	1.70	Low density PTFE
3	Outer conductor	1.85	Silver plated copper wire braiding
4	Middle layer	1.98	Aluminum foil
5	Outer shield	2.24	Stainless steel wire
6	Jacket	2.64	FEP



Electrical

Frequency	DC-50 GHz
Impedance	50 Ω
VSWR Max	1.45
IL Max(1 meter assembly)	5.7dB
*Mechanical Phase Stability	$< \pm 8^\circ$
Amplitude Stability vs Shaking	$< \pm 0.2\text{dB}$

Mechanical & Environmental

Min.Bending Radius Static 360°	10.5mm
Min. Bending Radius Repeated	26mm
Velocity of Propagation	75%
Temperature(Operation)	-50 ~ 125 °C
Temperature(Storage)	-60 ~ 125 °C

* Wrapped 360° around a 26 mm radius mandrel.

Bulk Cable Attenuation(Typical@25°C) & Power(VSWR=1.0; 40°C; Sea level)

Frequency MHz	300	1000	2000	4000	6000	9200	10000	12400	18000	26500	40000	50000
dB/100 Meter	32.6	60.1	85.8	122.8	151.9	190.4	199.0	223.2	272.9	337.2	424.0	480.9
Avg.Power kW	0.500	0.271	0.190	0.133	0.107	0.086	0.082	0.073	0.060	0.048	0.038	0.034
Attenuation at any frequency= $[1.860000 \times \text{SQRT}(\text{FMHz})] + [0.001300 \times \text{FMHz}]$												

- Notes:**
- 1) The above attenuation refers to typical loss of cable only, max loss is 1.1 times of typical loss. Insertion loss per connector is estimated as $0.03\text{dB} \times \text{SQRT Freq}(\text{GHz})$.
 - 2) Power handling values are calculated based on cable properties. Power handling will vary based on connector type and actual VSWR of the cable assembly.

Typical Test Data (MB260L-24M24M-4IN)

