


Tight Bend Triple-shielding Flexible Cable Assembly, Using M360

DC-26.5 GHz, SMA Male to SMA Male

MB360-SMAMSMAM-L(L:Length)

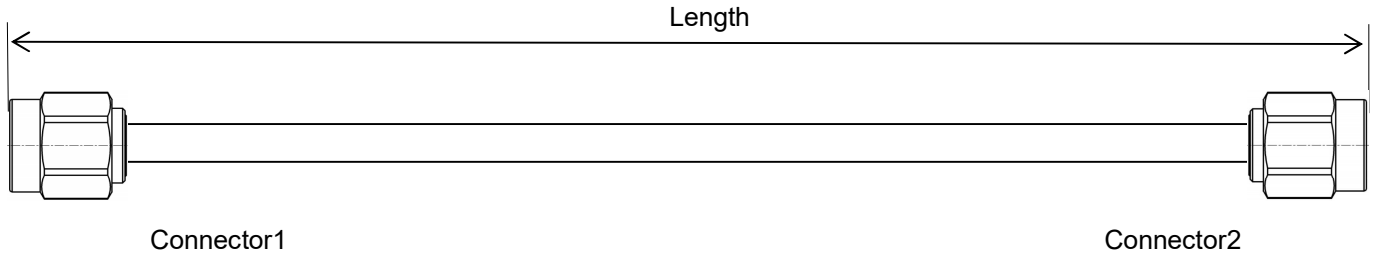


- Length can be in meter or in inch etc, e.g, MB360-SMAMSMAM-1M. Standard length tolerance: $\pm 1.5\%$. Custom lengths and other connector types available.
- Length is measured from one connector end to the other connector end as shown above. For RA connectors, use the pin center-line.

Configuration

Connector 1	SMA male	Connector 2	SMA male
Body	Passivated stainless steel	Body	Passivated stainless steel
Center Contact	Gold plated brass	Center Contact	Gold plated brass
Cable Type	MB360		

Cable Construction

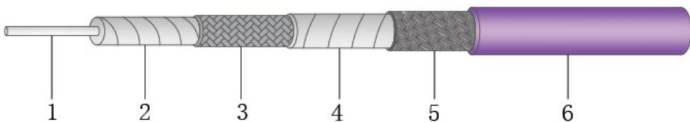

No.	Construction	Size (mm)	Materials
1	Center conductor	0.91	Silver plated copper
2	Dielectric	2.72	Low density PTFE
3	Outer conductor	2.79	Silver plated copper wire braiding
4	Middle layer	2.95	Aluminum foil
5	Outer shield	3.20	Stainless steel wire
6	Jacket	3.61	FEP



Electrical

Frequency	DC-26.5 GHz
Impedance	50 Ω
VSWR Max	1.35
IL Max(1 meter assembly)	2.7dB
Velocity of Propagation	76%

Mechanical & Environmental

Min.Bending Radius Static	15mm
Min. Bending Radius Repeated	36mm
Temperature(Operation)	-50~85 °C
Temperature(Storage)	-60~85 °C

Bulk Cable Attenuation(Typical@25°C) & Power(VSWR=1.0; 40°C; Sea level)

Frequency MHz	300	1000	2000	4000	6000	8000	10000	12000	14000	18000	26500
dB/100 Meter	21.6	39.8	56.7	80.9	99.8	115.9	130.3	143.4	155.6	177.8	218.8
Avg.Power kW	0.637	0.346	0.243	0.170	0.138	0.119	0.106	0.096	0.089	0.078	0.063

$$\text{Attenuation at any frequency} = [1.238070 \times \text{SQRT}(\text{FMHz})] + [0.000650 \times \text{FMHz}]$$

- Notes:**
- 1) The above attenuation refers to typical loss of cable only, max loss is 1.1 times of typical loss. Insertion loss per connector is estimated as 0.03dB x SQRT Freq(GHz).
 - 2) Power handling values are calculated based on cable properties. Power handling will vary based on connector type and actual VSWR of the cable assembly.

Typical Test Data (MB360-SMAMSMAM-60CM)

