




**Electrical & Environmental**

Impedance	50 ohm
Number of Output Ports	4 Way
Frequency Range	0.4-7.2 GHz
Insertion Loss	≤ 2.0dB (Excluding theoretical loss 3.0dB)
Input VSWR	1.3 max
Output VSWR	1.2 max
Isolation	18dB min
Amplitude Balance	≤ ±0.3dB
Phase Balance	≤ ±4°
Average Power Rating	20 Watts (As Divider), 1 Watts (As Combiner)
DC Current	0.77A (0.193A each port)
Operating Temperature	-45°C ~ +85°C

**Mechanical**

Input/Output Connectors	SMA Female
Housing Finishing	Painted Aluminum
Outline Dimensions	105*56*10 (mm)

**Dimensions**(Unit: mm/[inch], Tolerance: ±0.3mm)

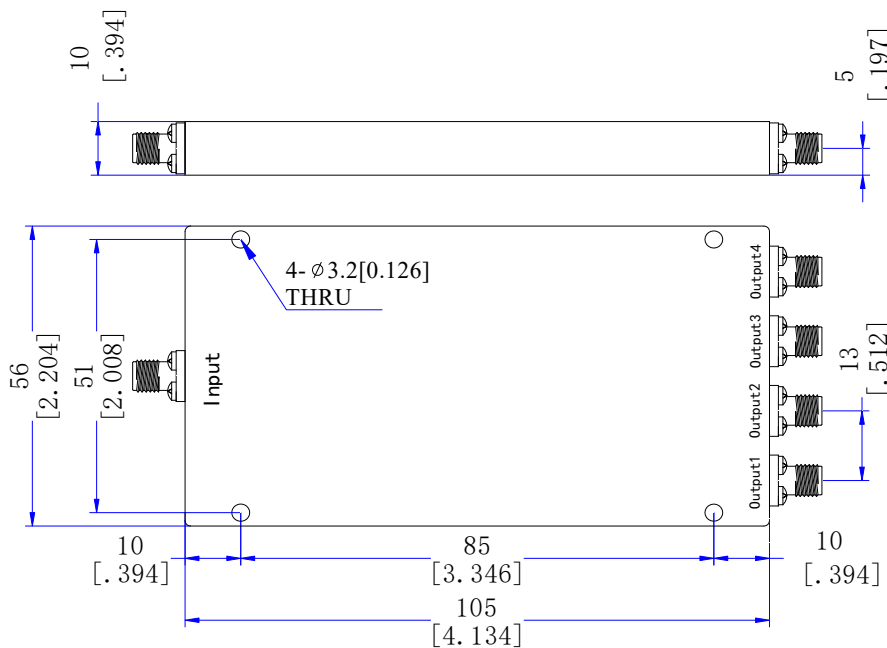



Typical Test Data

