Power Divider

PDM-0069027-S3

3 Way, 690-2700MHz, SMA, 30 Watts

Rev 1

Electrical & Environmental

Impedance	50 ohm
Number of Output Ports	3 Way
Frequency Range	690-2700MHz
Insertion Loss	≤ 0.8dB (Excluding theoretical loss 4.8dB)
Input VSWR	1.3 max
Output VSWR	1.2 max
Isolation	22dB min
Amplitude Balance	≤ ±0.5dB
Phase Balance	≤ ±5°
Average Power Rating	30 Watts (As Divider), 2 Watts (As Combiner)
Operating Temperature	-35℃ ~ +75℃

Mechanical

Input/Output Connectors	SMA Female
Housing Finishing	Sandblasting Aluminum with conductive oxidation
Outline Dimensions	84*50*12 (mm)
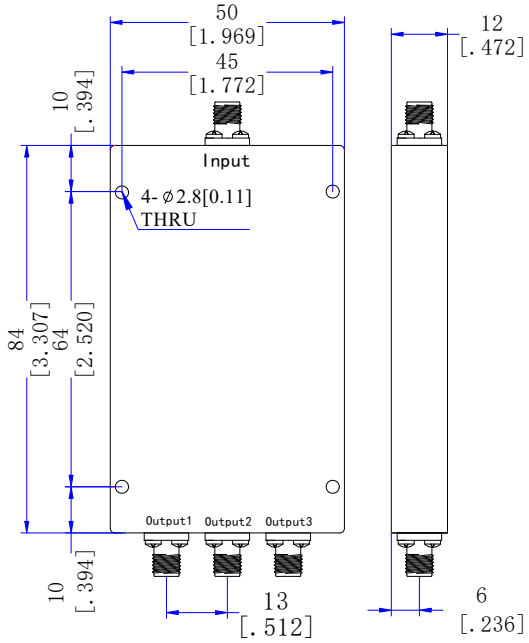
Dimensions(Unit: mm/[inch], Tolerance: ±0.3mm)