




Electrical & Environmental

Impedance	50 ohm
Number of Output Ports	2 Way
Frequency Range	DC-6 GHz
Insertion Loss	6 ± 0.6 dB (Including theoretical loss 6.0dB)
VSWR	≤ 1.2
Amplitude Balance	≤ ±0.2dB
Phase Balance	≤ ±3°
Input Power	1 Watts max
Operating Temperature	-40°C ~ +85°C

Mechanical

Input/Output Connectors	SMA Female Body: Brass or stainless steel, Center contact: Gold plated BeCu
Housing Finishing	Aluminum alloy housing, with electric conductive oxidation
Weight	25g

Dimensions(Unit: mm/[inch], Tolerance: ±0.3mm)

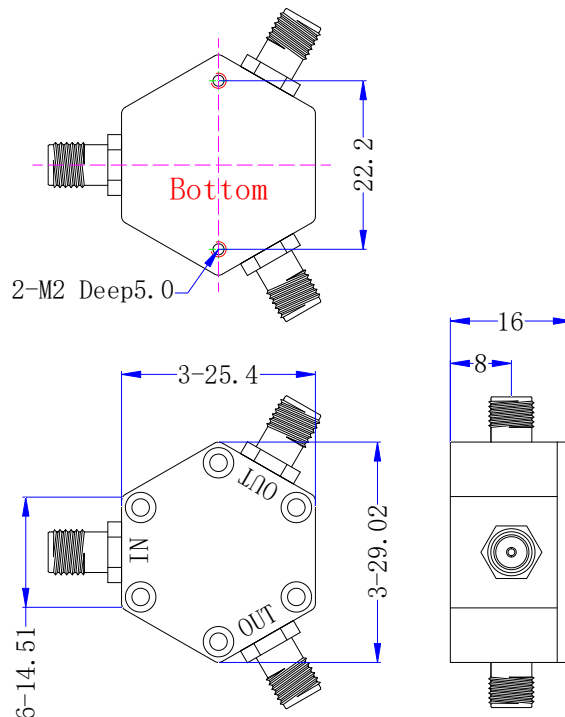



Typical Test Data

